




# Everything around $sl_{2+}^\epsilon$ is DoPeGDO. So what?

**Abstract.** I'll explain what "everything around" means: classical and quantum  $m, \Delta, S, tr, R, C,$  and  $\theta,$  as well as  $P, \Phi, J, \mathbb{D},$  and more, and all of their compositions. What **DoPeGDO** means: the category of **Docile Perturbed Gaussian Differential Operators**. And what  $sl_{2+}^\epsilon$  means: a solvable approximation of the semi-simple Lie algebra  $sl_2.$

Knot theorists should rejoice because all this leads to very powerful and well-behaved poly-time-computable knot invariants. Quantum algebraists should rejoice because it's a realistic playground for testing complicated equations and theories.

**Conventions.** 1. For a set  $A,$  let  $z_A := \{z_i\}_{i \in A}$  and let  $\zeta_A := \{z_i^* = \zeta_i\}_{i \in A}.$  †1. Everything converges!

## Less Abstract

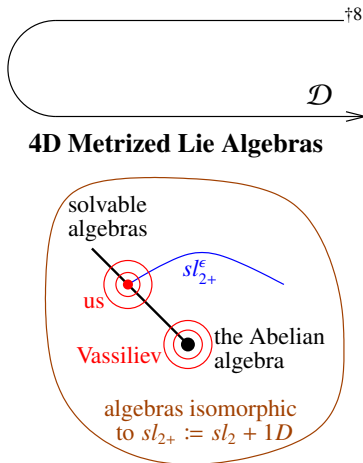

**DoPeGDO** := The category with objects finite sets<sup>†2</sup> and  $\text{mor}(A \rightarrow B):$

$$\{\mathcal{F} = \omega \exp(Q + P)\} \subset \mathbb{Q}[[\zeta_A, z_B]]$$

Where: •  $\omega$  is a scalar.<sup>†3</sup> •  $Q$  is a "small" quadratic in  $\zeta_A \cup z_B.$ <sup>†4</sup> •  $P$  is a "docile perturbation":  $P = \sum_{k \geq 1} \epsilon^k P^{(k)},$  where  $\text{deg } P^{(k)} \leq 2k + 2.$ <sup>†5</sup> • Compositions:<sup>†6</sup>

$$\mathcal{F} // \mathcal{G} = \mathcal{G} \circ \mathcal{F} := (\mathcal{G}|_{\zeta_i \rightarrow \partial_{z_i} \mathcal{F}})_{z_i=0} = (\mathcal{F}|_{z_i \rightarrow \partial_{\zeta_i} \mathcal{G}})_{\zeta_i=0}.$$

**Cool!**  $(V^*)^{\otimes \infty} \otimes V^{\otimes \infty}$  explodes; the ranks of quadratics and bounded-degree polynomials grow slowly!<sup>†7</sup> **Representation theory is over-rated!**

**Cool!** How often do you see a computational toolbox so successful?

**Our Algebras.** Let  $sl_{2+}^\epsilon := L\langle y, b, a, x \rangle$  subject to  $[a, x] = x, [b, y] = -\epsilon y, [a, b] = 0, [a, y] = -y, [b, x] = \epsilon x,$  and  $[x, y] = \epsilon a + b.$  So  $t := \epsilon a - b$  is central and if  $\exists \epsilon^{-1}, sl_{2+}^\epsilon / \langle t \rangle \cong sl_2.$   $U$  is either  $CU = \mathcal{U}(sl_{2+}^\epsilon)[[\hbar]]$  or  $QU = \mathcal{U}_\hbar(sl_{2+}^\epsilon) = A\langle y, b, a, x \rangle[[\hbar]]$  with  $[a, x] = x, [b, y] = -\epsilon y, [a, b] = 0, [a, y] = -y, [b, x] = \epsilon x,$  and  $xy - qyx = (1 - AB)/\hbar,$  where  $q = e^{\hbar \epsilon}, A = e^{-\hbar \epsilon a},$  and  $B = e^{-\hbar b}.$  Set also  $T = A^{-1}B = e^{\hbar t}.$

**The Quantum Leap.** Also decree that in  $QU,$

$$\Delta(y, b, a, x) = (y_1 + B_1 y_2, b_1 + b_2, a_1 + a_2, x_1 + A_1 x_2),$$
$$S(y, b, a, x) = (-B^{-1}y, -b, -a, -A^{-1}x),$$

and  $R = \sum \hbar^{j+k} y^k b^j \otimes a^j x^k / j! [k]_q!$

**Mid-Talk Debts.** • What is this good for in quantum algebra?

- In knot theory?
- How does the "inclusion"  $\mathcal{D}: \text{Hom}(U^{\otimes \infty} \rightarrow U^{\otimes S}) \rightsquigarrow$  **DoPeGDO** work?
- Proofs that everything around  $sl_{2+}^\epsilon$  really is **DoPeGDO**.
- Relations with prior art.
- The rest of the "compositions" story.

**Theorem** ([BG], conjectured [MM], elucidated [Ro1]). Let  $J_d(K)$  be the coloured Jones polynomial of  $K,$  in the  $d$ -dimensional representation of  $sl_2.$  Writing


$$\left. \frac{(q^{1/2} - q^{-1/2}) J_d(K)}{q^{d/2} - q^{-d/2}} \right|_{q=e^\hbar} = \sum_{j,m \geq 0} a_{jm}(K) d^j \hbar^m,$$

"below diagonal" coefficients vanish,  $a_{jm}(K) = 0$  if  $j > m,$  and "on diagonal" coefficients give the inverse of the Alexander polynomial:  $(\sum_{m=0}^\infty a_{mm}(K) \hbar^m) \cdot \omega(K)(e^\hbar) = 1.$

"Above diagonal" we have **Rozansky's Theorem** [Ro3, (1.2)]:

$$J_d(K)(q) = \frac{q^d - q^{-d}}{(q - q^{-1}) \omega(K)(q^d)} \left( 1 + \sum_{k=1}^\infty \frac{(q-1)^k \rho_k(K)(q^d)}{\omega^{2k}(K)(q^d)} \right).$$

**Compositions (1).** In  $\text{mor}(A \rightarrow B), Q = \sum_{i \in A, j \in B} E_{ij} \zeta_i z_j + \frac{1}{2} \sum_{i, j \in A} F_{ij} \zeta_i \zeta_j + \frac{1}{2} \sum_{i, j \in B} G_{ij} z_i z_j$

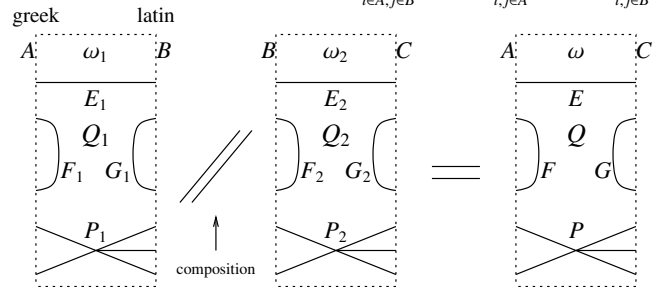

Where •  $E = E_1(I - F_2 G_1)^{-1} E_2.$   
 •  $F = F_1 + E_1 F_2 (I - G_1 F_2)^{-1} E_1^T.$   
 •  $G = G_2 + E_2^T G_1 (I - F_2 G_1)^{-1} E_2.$   
 •  $\omega = \omega_1 \omega_2 \det(I - F_2 G_1)^{-1}.$   
 •  $P$  is computed using "connected Feynman diagrams" or as the solution of a messy PDE (yet we're still in algebra!).



One abstraction level up from tangles!  
 {tangles} → {diagram} with compositions:

**DoPeGDO Footnotes.** †1. Each variable has a "weight"  $\in \{0, 1, 2\},$  and always  $\text{wt } z_i + \text{wt } \zeta_i = 2.$

- †2. Really, "weight-graded finite sets"  $A = A_0 \sqcup A_1 \sqcup A_2.$
- †3. Really, a power series in the weight-0 variables<sup>†9</sup>.
- †4. The weight of  $Q$  must be 2, so it decomposes as  $Q = Q_{20} + Q_{11}.$  The coefficients of  $Q_{20}$  are rational numbers while the coefficients of  $Q_{11}$  may be weight-0 power series<sup>†9</sup>.
- †5. Setting  $\text{wt } \epsilon = -2,$  the weight of  $P$  is  $\leq 2$  (so the powers of the weight-0 variables are not constrained<sup>†9</sup>).
- †6. There's also an obvious product  $\text{mor}(A_1 \rightarrow B_1) \times \text{mor}(A_2 \rightarrow B_2) \rightarrow \text{mor}(A_1 \sqcup A_2 \rightarrow B_1 \sqcup B_2).$
- †7. That is, if the weight-0 variables are ignored. Otherwise more care is needed yet the conclusion remains.
- †8.  $\text{Hom}(U^{\otimes \infty} \rightarrow U^{\otimes S}) \rightsquigarrow \text{mor}(\{\eta_i, \beta_i, \tau_i, \alpha_i, \xi_i\}_{i \in S} \rightarrow \{y_i, b_i, t_i, a_i, x_i\}_{i \in S}),$  where  $\text{wt}(\eta_i, \xi_i, y_i, x_i) = 1$  and  $\text{wt}(\beta_i, \tau_i, \alpha_i; b_i, t_i, a_i) = (2, 2, 0; 0, 0, 2).$
- †9. For tangle invariants the wt-0 power series are always rational functions in the exponentials of the wt-0 variables (for knots: just one variable), with degrees bounded linearly by the crossing number.

$\mathcal{D}: \text{Hom}(U^{\otimes \Sigma} \rightarrow U^{\otimes \Sigma}) \rightarrow \mathbb{Q}[[\eta_\Sigma, \beta_\Sigma, \alpha_\Sigma, \xi_\Sigma, y_\Sigma, b_\Sigma, a_\Sigma, x_\Sigma]]$ . The PBW theorem for  $CU$  (always in the  $ybax$  order), or its quantum analog for  $QU$ , say that if  $U = CU$  or  $QU$  then  $U^{\otimes \Sigma}$  is isomorphic as a vector space to  $\mathbb{Q}[y_i, b_i, a_i, x_i]_{i \in \Sigma}[[\hbar]]$ ; so it is enough to understand  $\text{Hom}(\mathbb{Q}[z_A] \rightarrow \mathbb{Q}[z_B])$  for finite sets  $A$  and  $B$ .

**Claim.**  $F \in \text{Hom}(\mathbb{Q}[z_A] \rightarrow \mathbb{Q}[z_B]) \xrightarrow{\sim} \mathbb{Q}[z_b][[\zeta_A]] \ni \mathcal{F}$  via

$$\mathcal{D}(F) := \sum_{n \in \mathbb{N}^A} \frac{\zeta_A^n}{n!} F(z_A^n) = F\left(\bigoplus_{a \in A} \zeta_a z_a\right) = \mathcal{F},$$

$$\mathcal{D}^{-1}(\mathcal{F})(p) = \left(\mathcal{F}|_{z_a \rightarrow \partial_{z_a} p}\right)_{\zeta_a=0} \quad \text{for } p \in \mathbb{Q}[[z_A]].$$

**Claim.** Assuming convergence, if  $F \in \text{Hom}(\mathbb{Q}[[z_A]] \rightarrow \mathbb{Q}[[z_B]])$ ,  $G \in \text{Hom}(\mathbb{Q}[[z_B]] \rightarrow \mathbb{Q}[[z_C]])$ ,  $\mathcal{F} = \mathcal{D}(F)$ , and  $\mathcal{G} = \mathcal{D}(G)$ , then

$$\mathcal{D}(F \circ G) = \left(\mathcal{F}|_{z_i \rightarrow \partial_{z_i} \mathcal{G}}\right)_{\zeta_i=0}.$$

And so the title of the talk finally makes sense!

**Example.**  $\mathcal{D}(id: U \rightarrow U) = \mathbb{Q}^{\eta y + \beta b + \alpha a + \xi x}$ .

**Example.** Let  $c\Delta_{jk}^i: CU^{\otimes \{i\}} \rightarrow CU^{\otimes \{j,k\}}$  be the standard co-product, given by  $c\Delta_{jk}^i(y_i, b_i, a_i, x_i) = (y_j + y_k, b_j + b_k, a_j + a_k, x_j + x_k)$ . Then

$$\begin{aligned} \mathcal{D}(c\Delta_{jk}^i) &= c\Delta_{jk}^i(\mathbb{Q}^{\eta_i y_i + \beta_i b_i + \alpha_i a_i + \xi_i x_i}) \\ &= \mathbb{Q}^{\eta_i(y_j + y_k) + \beta_i(b_j + b_k) + \alpha_i(a_j + a_k) + \xi_i(x_j + x_k)}. \end{aligned}$$

**Example.** The standard commutative product  $m_k^{ij}$  of polynomials is given by  $z_i, z_j \rightarrow z_k$ . Hence  $\mathcal{D}(m_k^{ij}) = m_k^{ij}(\mathbb{Q}^{\zeta_i z_i + \zeta_j z_j}) = \mathbb{Q}^{(\zeta_i + \zeta_j) z_k}$ .

$$\begin{array}{ccc} \mathbb{Q}[[z]]_i \otimes \mathbb{Q}[[z]]_j & \xrightarrow{m_k^{ij}} & \mathbb{Q}[[z]]_k \\ \parallel & & \parallel \\ \mathbb{Q}[[z_i, z_j]] & \xrightarrow{m_k^{ij}} & \mathbb{Q}[[z_k]] \end{array}$$

**A real DoPeGDO Example.** Let  $cm_k^{ij}: CU_i \otimes CU_j \rightarrow CU_k$  be “classical multiplication” for  $sl_{\mathbb{Z}_+}^2$ , and let  $\mathbb{O}_i: \mathbb{Q}[[y_i, b_i, a_i, x_i]] \rightarrow CU_i$  be the PBW ordering map.

$$\begin{array}{ccc} CU_i \otimes CU_j & \xrightarrow{cm_k^{ij}} & CU_k \\ \uparrow \mathbb{O}_{i,j} & & \uparrow \mathbb{O}_k \\ \mathbb{Q}[[y_i, b_i, a_i, x_i, y_j, b_j, a_j, x_j]] & & \mathbb{Q}[[y_k, b_k, a_k, x_k]] \end{array}$$

**Claim.** Let

$$\begin{aligned} \Lambda &= \left(\eta_i + \frac{e^{-\alpha_i - \epsilon \beta_i} \eta_j}{1 + \epsilon \eta_j \xi_i}\right) y_k + \left(\beta_i + \beta_j + \frac{\log(1 + \epsilon \eta_j \xi_i)}{\epsilon}\right) b_k + \\ &\quad \left(\alpha_i + \alpha_j + \log(1 + \epsilon \eta_j \xi_i)\right) a_k + \left(\frac{e^{-\alpha_j - \epsilon \beta_j} \xi_i}{1 + \epsilon \eta_j \xi_i} + \xi_j\right) x_k \end{aligned}$$

Then  $\mathbb{Q}^{\eta_i y_i + \beta_i b_i + \alpha_i a_i + \xi_i x_i + \eta_j y_j + \beta_j b_j + \alpha_j a_j + \xi_j x_j} // \mathbb{O}_{i,j} // cm_k^{ij} = \mathbb{Q}^\Lambda // \mathbb{O}_k$ , and hence  $\mathcal{D}(cm_k^{ij}) = \mathbb{Q}^\Lambda$  and  $cm_k^{ij}$  is DoPeGDO.

**Proof.** We compute in a faithful 2D representation  $\rho$  of  $CU$ :

( $\omega \epsilon \beta / \text{cm}$ )

$$\text{HL}[\mathcal{E}_-] := \text{Style}[\mathcal{E}, \text{Background} \rightarrow \text{If}[\text{TrueQ}[\mathcal{E}], \text{Green}, \text{Red}]];$$

$$\{\rho y = \begin{pmatrix} 0 & 0 \\ \epsilon & 0 \end{pmatrix}, \rho b = \begin{pmatrix} 0 & 0 \\ 0 & -\epsilon \end{pmatrix}, \rho a = \begin{pmatrix} 1 & 0 \\ 0 & 0 \end{pmatrix}, \rho x = \begin{pmatrix} 0 & 1 \\ 0 & 0 \end{pmatrix}\};$$

$$\begin{aligned} \text{HL} / @ \{ \rho a . \rho x - \rho x . \rho a &= \rho x, \rho a . \rho y - \rho y . \rho a &= -\rho y, \\ \rho b . \rho y - \rho y . \rho b &= -\epsilon \rho y, \rho b . \rho x - \rho x . \rho b &= \epsilon \rho x, \\ \rho x . \rho y - \rho y . \rho x &= \rho b + \epsilon \rho a \end{aligned}$$

{True, True, True, True, True}

HL@Simplify@With[{E = MatrixExp},

$$\begin{aligned} &\text{E}[\eta_i \rho y] . \text{E}[\beta_i \rho b] . \text{E}[\alpha_i \rho a] . \text{E}[\xi_i \rho x] . \text{E}[\eta_j \rho y] . \text{E}[\beta_j \rho b] . \\ &\text{E}[\alpha_j \rho a] . \text{E}[\xi_j \rho x] == \\ &\text{E}[\partial_{y_k} \Lambda \rho y] . \text{E}[\partial_{b_k} \Lambda \rho b] . \text{E}[\partial_{a_k} \Lambda \rho a] . \text{E}[\partial_{x_k} \Lambda \rho x] \end{aligned}$$

True

Series[ $\Lambda, \{\epsilon, 0, 1\}$ ]

$$\begin{aligned} &(\mathbf{a}_k (\alpha_i + \alpha_j) + \mathbf{y}_k (\eta_i + e^{-\alpha_i} \eta_j) + \\ &\mathbf{b}_k (\beta_i + \beta_j + \eta_j \xi_i) + \mathbf{x}_k (e^{-\alpha_j} \xi_i + \xi_j)) + \\ &\left( \mathbf{a}_k \eta_j \xi_i - \frac{1}{2} \mathbf{b}_k \eta_j^2 \xi_i^2 - e^{-\alpha_i} \mathbf{y}_k \eta_j (\beta_i + \eta_j \xi_i) - \right. \\ &\left. e^{-\alpha_j} \mathbf{x}_k \xi_i (\beta_j + \eta_j \xi_i) \right) \epsilon + \mathcal{O}[\epsilon]^2 \end{aligned}$$

(Shame, but this technique fails for  $QU$ ).

**Claim. In  $QU$ ,  $R$  is DoPeGDO.**

**Proof.** Recall that with  $q = e^{\hbar \epsilon}$ ,

$$R = \sum \hbar^{j+k} y^k b^j \otimes a^j x^k / j! [k]_q! = \mathcal{O}\left(\mathbb{Q}^{\hbar b_1 a_2} e_q^{\hbar y_1 x_2}\right).$$

Now expand  $e_q^{\hbar y_1 x_2}$  in powers of  $\epsilon$  using:

**Faddeev's Formula** (In as much as we can tell, first appeared without proof in Faddeev [Fa], rediscovered and proven in Quesne [Qu], and again with easier proof, in Zagier [Za]). With  $[n]_q := \frac{q^n - 1}{q - 1}$ , with  $[n]_q! := [1]_q [2]_q \cdots [n]_q$  and with  $e_q^x := \sum_{n \geq 0} \frac{x^n}{[n]_q!}$ , we have

$$\log e_q^x = \sum_{k \geq 1} \frac{(1 - q)^k x^k}{k(1 - q^k)} = x + \frac{(1 - q)^2 x^2}{2(1 - q^2)} + \dots$$

**Proof.** We have that  $e_q^x = \frac{e^{qx} - e_q^x}{qx - x}$  (“the  $q$ -derivative of  $e_q^x$  is itself”), and hence  $e_q^{qx} = (1 + (1 - q)x)e_q^x$ , and

$$\log e_q^{qx} = \log(1 + (1 - q)x) + \log e_q^x.$$

Writing  $\log e_q^x = \sum_{k \geq 1} a_k x^k$  and comparing powers of  $x$ , we get  $q^k a_k = -(1 - q)^k / k + a_k$ , or  $a_k = \frac{(1 - q)^k}{k(1 - q^k)}$ .  $\square$

**Compositions (2).** Recall that with all indices  $i$  running in some set  $B$ ,

$$\mathcal{F} // \mathcal{G} = \left(\mathcal{F}|_{z_i \rightarrow \partial_{z_i} \mathcal{G}}\right)_{\zeta_i=0} \stackrel{(1)}{=} \mathbb{Q}^{\sum \partial_{z_i} \partial_{z_i} (\mathcal{F} \mathcal{G})} \Big|_{z_i = \zeta_i = 0}, \quad \begin{array}{l} (1) \text{ Strictly speaking,} \\ \text{true only when} \\ B \cap (A \cup C) = \emptyset. \end{array}$$

so in general we wish to understand

$$[F: \mathcal{E}]_B := \mathbb{Q}^{\frac{1}{2} \sum_{i,j \in B} F_{ij} \partial_{z_i} \partial_{z_j} \mathcal{E}} \quad \text{and} \quad \langle F: \mathcal{E} \rangle_B := [F: \mathcal{E}]_B|_{z_B \rightarrow 0},$$

where  $\mathcal{E}$  is a docile perturbed Gaussian. The following lemma allows us to restrict to the case where  $\mathcal{E}$  has no  $B$ - $B$  quadratic part:

**Lemma 1.** With convergences left to the reader,

$$\left\langle F: \mathcal{E} \mathbb{Q}^{\frac{1}{2} \sum_{i,j \in B} G_{ij} z_i z_j} \right\rangle_B = \det(1 - GF)^{-1} \left\langle F(1 - GF)^{-1}: \mathcal{E} \right\rangle_B.$$


The next lemma dispatches the case where  $\mathcal{E}$  has a  $B$ -linear part:

**Lemma 2.**  $\left\langle F: \mathcal{E} \mathbb{Q}^{\sum_{i \in B} y_i z_i} \right\rangle_B = \left\langle F: \mathcal{E}|_{z_B \rightarrow z_B + F y_B} \right\rangle_B$ .

Finally, we deal with the docile perturbation case:

**Lemma 3.** With an extra variable  $\lambda$ ,  $Z_\lambda := \log[\lambda F: e^P]_B$  satisfies and is determined by the following PDE / IVP:

$$Z_0 = P \quad \text{and} \quad \partial_\lambda Z_\lambda = \sum_{i,j \in B} F_{ij} \left( \partial_{z_i} \partial_{z_j} Z_\lambda + (\partial_{z_i} Z_\lambda)(\partial_{z_j} Z_\lambda) \right).$$

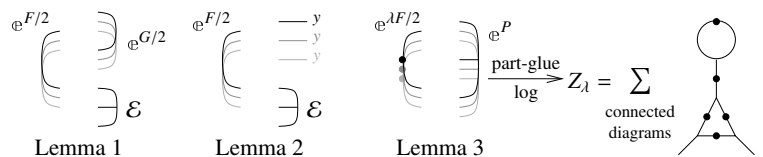

- ✓ Relate with finite type (Vassiliev) invariants.
- ✓ Find a knot-theoretic foundation for this story.
- ✓ Understand "the subspace of classical knots/tangles".
- ✓ Implement the dequantizers.
- ✓ Use to study the links of several quantization.
- ✓ Implement  $\mathbb{Q}$  and  $\mathbb{J}$  figure out the appropriate
- ✓ implement zipping at the log-level. <sup>wt=0</sup> ground ring.
- ✓ understand tr and links.

## A Partial To Do List.

- Find “internal” proofs of consistency.
- Understand denominators and get rid of them.
- Clean the program and make it efficient.
- Run it for all small knots and links, at  $k = 3, 4$ .
- Understand the centre and figure out how to read the output.
- Extend to  $sl_3$  and beyond.
- Describe a genus bound and a Seifert formula.
- Obtain “Gauss-Gassner formulas” ( $\omega\epsilon\beta$ /NCSU).
- Relate with Melvin-Morton-Rozansky and with Rozansky-Overbay.

*the representation theory dogmas*

- Understand the braid group representations that arise.
- Find a topological interpretation. The Garoufalidis-Rozansky “loop expansion” [GR]?
- Figure out the action of the Cartan automorphism.
- **Disprove the ribbon-slice conjecture!** *blue.*
- Figure out the action of the Weyl group.
- Do everything at the “arrow diagram” level of finite-type invariants of (rotational) virtual tangles.
- What else can you do with the “solvable approximations”?
- And with the “Gaussian compositions” technology?

*better banking (skipped)*

**Warning.** Some implementation details match earlier versions of the theory.

*The “old zipping” comment here.*  
**The “Speedy” Engine**

$\omega\epsilon\beta$ /engine

## Internal Utilities

Canonical Form:

```
CCF [E_] :=
  PPCF@ExpandDenominator@
  ExpandNumerator@PPTogether@Together [PPExp [
    Expand [E] /. e^x e^y -> e^{x+y} /. e^x -> e^{CCF[x]}]];
CF [E_List] := CF /@ E;
CF [sd_SeriesData] := MapAt [CF, sd, 3];
CF [E_] := PPCF@Module [
  {vs = Cases [E, (y | b | t | a | x | η | β | τ | α | ξ)_ , ∞] U
  {y, b, t, a, x, η, β, τ, α, ξ}},
  Total [CoefficientRules [Expand [E], vs] /.
  (ps_ -> c_) -> CCF [c] (Times @@ vs^{ps})
];
CF [E_E] := CF /@ E;
CF [E_Sp__ [ES___]] := CF /@ E_Sp [ES];
```

The Kronecker  $\delta$ :

```
Kδ /: Kδ_{i,j} := If [i === j, 1, 0];
```

Equality, multiplication, and degree-adjustment of perturbed Gaussians;  $\mathbb{E}[L, Q, P]$  stands for  $e^{L+Q}P$ :

```
E /: E [L1_, Q1_, P1_] ≡ E [L2_, Q2_, P2_] :=
  CF [L1 == L2] ∧ CF [Q1 == Q2] ∧ CF [Normal [P1 - P2] == 0];
E /: E [L1_, Q1_, P1_] × E [L2_, Q2_, P2_] :=
  E [L1 + L2, Q1 + Q2, P1 * P2];
E [L_, Q_, P_]_{k} := E [L, Q, Series [Normal@P, {ε, 0, $k}]];
```

## Zip and Bind

Variables and their duals:

```
{t*, b*, y*, a*, x*, z*} = {τ, β, η, α, ε, ζ};
{t, b, y, a, x, z} = {t, b, y, a, x, z};
(u_{-i})^* := (u^*)_i;
```

Upper to lower and lower to Upper:

```
U2L = {B_{-i}^p -> e^{-p h y b_i}, B_{-i}^p -> e^{-p h y b}, T_{-i}^p -> e^{p h t_i},
  T_{-i}^p -> e^{p h t}, A_{-i}^p -> e^{p y a_i}, A_{-i}^p -> e^{p y a}};
L2U = {e^{c_{-i} b_i + d_{-i}} -> B_{-i}^{-c/(h y)} e^d, e^{c_{-i} b + d_{-i}} -> B^{-c/(h y)} e^d,
  e^{c_{-i} t_i + d_{-i}} -> T_{-i}^{c/h} e^d, e^{c_{-i} t + d_{-i}} -> T^{c/h} e^d,
  e^{c_{-i} a_i + d_{-i}} -> A_{-i}^{c/y} e^d, e^{c_{-i} a + d_{-i}} -> A^{c/y} e^d,
  e^ε -> e^{Expand@E}};
```

Derivatives in the presence of exponentiated variables:

```
D_b [f_] := ∂_b f - h y B ∂_b f; D_{b_i} [f_] := ∂_{b_i} f - h y B_i ∂_{b_i} f;
D_t [f_] := ∂_t f + h T ∂_t f; D_{t_i} [f_] := ∂_{t_i} f + h T_i ∂_{t_i} f;
D_α [f_] := ∂_α f + y A ∂_α f; D_{α_i} [f_] := ∂_{α_i} f + y A_i ∂_{α_i} f;
D_v [f_] := ∂_v f; D_{(v,0)} [f_] := f; D_{()} [f_] := f;
D_{(v,n_Integer)} [f_] := D_v [D_{(v,n-1)} [f]];
D_{(L_List, L_S___)} [f_] := D_{(L_S)} [D_L [f]];
```

Finite Zips:

```
collect [sd_SeriesData, E_] :=
  MapAt [collect [# , E] &, sd, 3];
collect [E_, E_] := PPCollect@Collect [E, E];
Zip_{()} [P_] := P;
Zip_{E_S} [P_S_List] := Zip_{E_S} /@ P_S;
Zip_{(E_S, E_S___)} [P_] := PPZip [
  (collect [P // Zip_{(E_S)}, E] /. f_ . E^{d_} -> (D_{(E_S^*, d)} [f])) / .
  E^* -> 0 /. ((E^* /. {b -> B, t -> T, α -> A}) -> 1)];
```

QZip implements the “Q-level zips” on  $\mathbb{E}(L, Q, P) = e^{L+Q}P(\epsilon)$ . Such zips regard the L variables as scalars.

```
QZip_{E_S_List}@E [L_, Q_, P_] :=
  PPQZip@Module [{E, z, zs, c, ys, ηs, qt, zrule, E_rule, out},
  zs = Table [E^*, {E, E_S}];
  c = CF [Q /. Alternatives @@ (E_S U zs) -> 0];
  ys = CF@Table [∂_E (Q /. Alternatives @@ zs -> 0),
  {E, E_S}];
  ηs = CF@Table [∂_z (Q /. Alternatives @@ E_S -> 0), {z, zs}];
  qt = CF@Inverse@Table [Kδ_{z, E^*} - ∂_{z, E} Q, {E, E_S}, {z, zs}];
  zrule = Thread [zs -> CF [qt . (zs + ys)]];
  E_rule = Thread [E_S -> E_S + ηs.qt];
  CF /@ E [L, c + ηs.qt.y,
  Det [qt] Zip_{E_S} [P /. (zrule U E_rule)]]];
```

LZip implements the “L-level zips” on  $\mathbb{E}(L, Q, P) = P e^{L+Q}$ . Such zips regard all of  $P e^Q$  as a single “P”. Here the z’s are b and α and the E’s are β and a.

```

LZip $\mathcal{E}_S$ List@E[L_, Q_, P_] :=
  PP_LZip@Module[{ $\mathcal{E}$ , z, zS, Zs, c, ys,  $\eta$ s, lt, zrule,
    Zrule,  $\mathcal{E}$ rule, Q1, EEQ, EQ},
    zS = Table[ $\mathcal{E}$ *, { $\mathcal{E}$ ,  $\mathcal{E}$ s}];
    Zs = zS /. {b  $\rightarrow$  B, t  $\rightarrow$  T,  $\alpha$   $\rightarrow$  A};
    c = L /. Alternatives @@ ( $\mathcal{E}$ s  $\cup$  zS)  $\rightarrow$  0 /.
      Alternatives @@ Zs  $\rightarrow$  1;
    ys = Table[ $\partial_{\mathcal{E}}$ (L /. Alternatives @@ zS  $\rightarrow$  0), { $\mathcal{E}$ ,  $\mathcal{E}$ s}];
     $\eta$ s = Table[ $\partial_z$ (L /. Alternatives @@  $\mathcal{E}$ s  $\rightarrow$  0), {z, zS}];
    lt = Inverse@Table[K $\delta_{z,\mathcal{E}}$ * -  $\partial_{z,\mathcal{E}}$ L, { $\mathcal{E}$ ,  $\mathcal{E}$ s}, {z, zS}];
    zrule = Thread[zS  $\rightarrow$  lt.(zS + ys)];
    Zrule = Join[zrule,
      zrule /.
        r_Rule  $\Rightarrow$  ((U = r[[1]] /. {b  $\rightarrow$  B, t  $\rightarrow$  T,  $\alpha$   $\rightarrow$  A})  $\rightarrow$ 
          (U /. U21 /. r /. 12U));
     $\mathcal{E}$ rule = Thread[ $\mathcal{E}$ s  $\rightarrow$   $\mathcal{E}$ s +  $\eta$ s.lt];
    Q1 = Q /. (Zrule  $\cup$   $\mathcal{E}$ rule);
    EEQ[ps___] :=
      EEQ[ps] =
        PPEEQ@(CF[e-Q1 DThread[{zS, {ps}}][eQ1]] /.
          {Alternatives @@ zS  $\rightarrow$  0, Alternatives @@ Zs  $\rightarrow$  1});
    CF@E[c +  $\eta$ s.lt.yS,
      Q1 /. {Alternatives @@ zS  $\rightarrow$  0, Alternatives @@ Zs  $\rightarrow$  1},
      Det[lt]
      (Zip $\mathcal{E}$ s[(EQ @@ zS)(P /. (Zrule  $\cup$   $\mathcal{E}$ rule))] /.
        Derivative[ps___][EQ][___]  $\Rightarrow$  EEQ[ps] /.
          _EQ  $\rightarrow$  1) ]];

```

```

B{}[L_, R_] := L R;
B{is___}[L_E, R_E] := PP_B@Module[{n},
  Times[
    L /. Table[(v : b | B | t | T | a | x | y)_i  $\rightarrow$  vnei,
      {i, {is}}],
    R /. Table[(v :  $\beta$  |  $\tau$  |  $\alpha$  | A |  $\xi$  |  $\eta$ )_i  $\rightarrow$  vnei, {i, {is}}]
  ] // LZipJoin@Table[{ $\beta$ nei,  $\tau$ nei, anei}, {i, {is}}] //
  QZipJoin@Table[{ $\xi$ nei,  $\eta$ nei}, {i, {is}}] ];
Bis___[L_, R_] := B{is}[L, R];

```

## E morphisms with domain and range.

```

Bis_List[Ed1 $\rightarrow$ r1[L1_, Q1_, P1_], Ed2 $\rightarrow$ r2[L2_, Q2_, P2_]] :=
  E(d1  $\cup$  Complement[d2, is])  $\rightarrow$  (r2  $\cup$  Complement[r1, is]) @@
  Bis[E[L1, Q1, P1], E[L2, Q2, P2]];
Ed1 $\rightarrow$ r1[L1_, Q1_, P1_] // Ed2 $\rightarrow$ r2[L2_, Q2_, P2_] :=
  Br1  $\cap$  d2 [Ed1 $\rightarrow$ r1[L1, Q1, P1], Ed2 $\rightarrow$ r2[L2, Q2, P2]];
Ed1 $\rightarrow$ r1[L1_, Q1_, P1_]  $\equiv$  Ed2 $\rightarrow$ r2[L2_, Q2_, P2_]  $\wedge$  :=
  (d1 = d2)  $\wedge$  (r1 = r2)  $\wedge$  (E[L1, Q1, P1]  $\equiv$  E[L2, Q2, P2]);
Ed1 $\rightarrow$ r1[L1_, Q1_, P1_] Ed2 $\rightarrow$ r2[L2_, Q2_, P2_]  $\wedge$  :=
  E(d1  $\cup$  d2)  $\rightarrow$  (r1  $\cup$  r2) @@ (E[L1, Q1, P1]  $\times$  E[L2, Q2, P2]);
Edr[L_, Q_, P_]  $\$_k$  := Edr @@ E[L, Q, P]  $\$_k$ ;
E_E[i_] := {E}[i];

```

## E[A]

```

Edr[A_] :=
  CF@Module[{L,  $\Delta$ 0 = Limit[A,  $\epsilon$   $\rightarrow$  0]},
    Edr[L =  $\Delta$ 0 /. ( $\eta$  | y |  $\xi$  | x)_  $\rightarrow$  0,  $\Delta$ 0 - L, eA- $\Delta$ 0] $\$_k$  /. 12U]

```

## Exponentials as needed.

Task. Define  $\text{Exp}_{m,i,k}[P]$  to compute  $e^{\mathcal{O}(P)}$  to  $\epsilon^k$  in the using the  $m_{i,j \rightarrow i}$  multiplication, where  $P$  is an  $\epsilon$ -dependent near-docile element, giving the answer in  $\mathbb{E}$ -form.

Methodology. If  $P_0 := P_{\epsilon=0}$  and  $e^{\lambda \mathcal{O}(P)} = \mathcal{O}(e^{\lambda P_0} F(\lambda))$ , then

$F(\lambda=0) = 1$  and we have:

$$\mathcal{O}(e^{\lambda P_0}(P_0 F(\lambda) + \partial_\lambda F)) = \mathcal{O}(\partial_\lambda e^{\lambda P_0} F(\lambda)) =$$

$$\partial_\lambda \mathcal{O}(e^{\lambda P_0} F(\lambda)) = \partial_\lambda e^{\lambda \mathcal{O}(P)} = e^{\lambda \mathcal{O}(P)} \mathcal{O}(P) = \mathcal{O}(e^{\lambda P_0} F(\lambda)) \mathcal{O}(P)$$

This is a linear ODE for  $F$ . Setting inductively  $F_k = F_{k-1} + \epsilon^k \varphi$  we find that  $F_0 = 1$  and solve for  $\varphi$ .

(\* Bug: The first line is valid only if  $\mathcal{O}(e^{P_0}) = e^{\mathcal{O}(P_0)}$ .)

```

Expm, i, 0[P_] := Module[{LQ = Normal@P /.  $\epsilon$   $\rightarrow$  0},
  E[LQ /. (x | y)_i  $\rightarrow$  0, LQ /. (b | a | t)_i  $\rightarrow$  0, 1] ];

```

```

Expm, i, k[P_] := Block[{ $\$k = k$ },
  Module[{P0,  $\lambda$ ,  $\varphi$ ,  $\varphi$ s, F, j, rhs, eqn, pows, at0, at $\lambda$ },
    P0 = Normal@P /.  $\epsilon$   $\rightarrow$  0;
    F = Normal@Last@Expm, i, k-1[ $\lambda$  P];
    While[
      rhs =
        mi, j  $\rightarrow$  i[
          E{i}  $\rightarrow$  {i}[ $\lambda$  P0 /. (x | y)_i  $\rightarrow$  0,  $\lambda$  P0 /. (b | a | t)_i  $\rightarrow$  0,
            F] $\$_k$  s $\sigma_{i \rightarrow j}$ @E{i}  $\rightarrow$  {i}[0, 0, P] $\$_k$ ] // Last // Normal;
          eqn = CF[( $\partial_\lambda$ F) + P0 F - rhs];
          eqn =!= 0, (*do*)
          pows = First@CoefficientRules[eqn, {yi, bi, ai, xi}];
          F += Sum[ $\epsilon^k$   $\varphi_{js}$ [ $\lambda$ ] Times @@ {yi, bi, ai, xi}js,
            {js, pows}];
          rhs =
            mi, j  $\rightarrow$  i[
              E{i}  $\rightarrow$  {i}[ $\lambda$  P0 /. (x | y)_i  $\rightarrow$  0,  $\lambda$  P0 /. (b | a | t)_i  $\rightarrow$  0,
                F] $\$_k$  s $\sigma_{i \rightarrow j}$ @E{i}  $\rightarrow$  {i}[0, 0, P] $\$_k$ ] // Last // Normal;
              eqn = CF[( $\partial_\lambda$ F) + P0 F - rhs];
               $\varphi$ s = Table[ $\varphi_{js}$ [ $\lambda$ ], {js, pows}];
              at0 = Table[ $\varphi_{js}$ [0] == 0, {js, pows}];
              at $\lambda$  = (# == 0) & /@
                (pows /. CoefficientRules[eqn, {yi, bi, ai, xi}]);
              F = F /. DSolve[And @@ (at0  $\cup$  at $\lambda$ ),  $\varphi$ s,  $\lambda$ ][[1]]
            ];
          E{i}  $\rightarrow$  {i}[P0 /. (x | y)_i  $\rightarrow$  0, P0 /. (b | a | t)_i  $\rightarrow$  0,
            F + 0[ $\epsilon$ ]k+1 /.  $\lambda$   $\rightarrow$  1] ] ]

```

## “Define” Code

Define[lhs = rhs, ...] defines the lhs to be rhs, except that rhs is computed only once for each value of \$k. Fancy Mathematica not for the faint of heart. Most readers should ignore.



```

SetAttributes[Define, HoldAll];
Define[def_, defs__] := (Define[def]; Define[defs]);
Define[op_is__ = ε_] :=
Module[{SD, ii, jj, kk, isp, nis, nisp, sis},
Block[{i, j, k},
ReleaseHold[Hold[
SD[op_nisp, $k_Integer, PPBoot@Block[{i, j, k}, op_isp, $k = ε;
op_nis, $k];
SD[op_isp, op_{is}, $k]; SD[op_sis__, op_{sis}];
] /. {SD → SetDelayed,
isp → {is} /. {i → i_, j → j_, k → k_},
nis → {is} /. {i → ii, j → jj, k → kk},
nisp → {is} /. {i → ii_, j → jj_, k → kk_}
}]]]

```

```


Define[as_i = (aσ_{i→2} R_{1,i}) // P_{1,2},
a_s_i = E_{i→{i}}[-a_i α_i, -x_i A_i ξ_i,
1 + If[$k == 0, 0, (a_s_{i,$k-1}) $k [3] -
((a_s_{i,0}) $k // as_i // (a_s_{i,$k-1}) $k) [3]]]

```

```

Define[bs_i = bσ_{i→1} R_{1,2} // aS_2 // P_{1,2},
b_s_i = bσ_{i→1} R_{1,2} // aS_2 // P_{1,2},
aΔ_{i→j,k} = (R_{1,j} R_{2,k}) // bm_{1,2→3} // P_{3,i},
bΔ_{i→j,k} = (R_{j,1} R_{k,2}) // am_{1,2→3} // P_{i,3}

```



The Drinfel'd double:

## The Objects

$\omega\beta$ /objects

### Symmetric Algebra Objects

```

sm_{i,j→k} :=
E_{i,j→{k}}[b_k (β_i + β_j) + t_k (τ_i + τ_j) + a_k (α_i + α_j) +
y_k (η_i + η_j) + x_k (ξ_i + ξ_j)];
sΔ_{i→j,k} :=
E_{i→{j,k}}[β_i (b_j + b_k) + τ_i (t_j + t_k) + α_i (a_j + a_k) +
η_i (y_j + y_k) + ξ_i (x_j + x_k)];
sS_i := E_{i→{i}}[-β_i b_i - τ_i t_i - α_i a_i - η_i y_i - ξ_i x_i];
se_i := E_{i→{i}}[0];
sη_i := E_{i→{i}}[0];
sσ_{i→j} := E_{i→{j}}[β_i b_j + τ_i t_j + α_i a_j + η_i y_j + ξ_i x_j];
sY_{i→j,k,l,m} := E_{i→{j,k,l,m}}[β_i b_k + τ_i t_k + α_i a_l + η_i y_j + ξ_i x_m];

```

### The CU Definitions

$$c\Delta = \left( \eta_i + \frac{e^{-\gamma \alpha_i - \epsilon \beta_i} \eta_j}{1 + \gamma \epsilon \eta_j \xi_i} \right) y_k + \left( \beta_i + \beta_j + \frac{\text{Log}[1 + \gamma \epsilon \eta_j \xi_i]}{\epsilon} \right) b_k + \left( \alpha_i + \alpha_j + \frac{\text{Log}[1 + \gamma \epsilon \eta_j \xi_i]}{\gamma} \right) a_k + \left( \frac{e^{-\gamma \alpha_j - \epsilon \beta_j} \xi_i}{1 + \gamma \epsilon \eta_j \xi_i} + \xi_j \right) x_k;$$

```
Define[cm_{i,j→k} = E_{i,j→{k}}[cΔ]]
```

```

Define[cσ_{i→j} = sσ_{i,j} /. τ_i → 0, ce_i = se_i, cη_i = sη_i,
cΔ_{i→j,k} = sΔ_{i→j,k},
cS_i = sS_i // sY_{i→1,2,3,4} // cm_{4,3→i} // cm_{i,2→i} // cm_{i,1→i}];

```

### Booting Up QU

```

Define[aσ_{i→j} = E_{i→{j}}[a_j α_i + x_j ξ_i],
bσ_{i→j} = E_{i→{j}}[b_j β_i + y_j η_i]
Define[am_{i,j→k} = E_{i,j→{k}}[(α_i + α_j) a_k + (A_j^{-1} ξ_i + ξ_j) x_k],
bm_{i,j→k} = E_{i,j→{k}}[(β_i + β_j) b_k + (η_i + e^{-ε β_i} η_j) y_k]]

```

```

Define[R_{i,j} = E_{i→{i,j}}[ħ a_j b_i + ∑_{k=1}^{$k+1} \frac{(1 - e^{\gamma \epsilon \hbar})^k (\hbar y_i x_j)^k}{k (1 - e^{k \gamma \epsilon \hbar})}],
R_{i,j} = CF@E_{i→{i,j}}[-ħ a_j b_i, -ħ x_j y_i / B_i,
1 + If[$k == 0, 0, (R_{i,j,$k-1}) $k [3] -
((R_{i,j,0}) $k R_{1,2} (R_{(3,4),$k-1}) $k) // (bm_{i,1→i} am_{j,2→j}) //
(bm_{i,3→i} am_{j,4→j})] [3]],
P_{i,j} = E_{i,j→{}}[β_i α_j / ħ, η_i ξ_j / ħ,
1 + If[$k == 0, 0, (P_{i,j,$k-1}) $k [3] -
(R_{1,2} // ((P_{(1,j),0}) $k (P_{(i,2),$k-1}) $k)) [3]]]

```

```

Define[
dm_{i,j→k} =
((sY_{i→4,4,1,1} // aΔ_{1→1,2} // aΔ_{2→2,3} // aS_3)
(sY_{j→-1,-1,-4,-4} // bΔ_{-1→-1,-2} // bΔ_{-2→-2,-3})) //
(P_{-1,3} P_{-3,1} am_{2,-4→k} bm_{4,-2→k})]

```

```

Define[dσ_{i→j} = aσ_{i→j} bσ_{i→j},
de_i = se_i, dη_i = sη_i,
dS_i = sY_{i→1,1,2,2} // (bS_i aS_2) // dm_{2,1→i},
d_s_i = sY_{i→1,1,2,2} // (bS_i a_s_2) // dm_{2,1→i},
dΔ_{i→j,k} = (bΔ_{i→3,1} aΔ_{i→2,4}) // (dm_{3,4→k} dm_{1,2→j})]

```

```

Define[C_i = E_{i→{i}}[0, 0, B_i^{1/2} e^{-ħ ε a_i/2}] $k,
C_bar_i = E_{i→{i}}[0, 0, B_i^{-1/2} e^{ħ ε a_i/2}] $k,
Kink_i = (R_{1,3} C_bar_2) // dm_{1,2→1} // dm_{1,3→i},
Kink_bar_i = (R_bar_{1,3} C_2) // dm_{1,2→1} // dm_{1,3→i}]

```

Note.  $t = \epsilon a - \gamma b$  and  $b = -t / \gamma + \epsilon a / \gamma$ .

```

Define[b2t_i = E_{i→{i}}[α_i a_i + β_i (ε a_i - t_i) / γ + ξ_i x_i + η_i y_i],
t2b_i = E_{i→{i}}[α_i a_i + τ_i (ε a_i - γ b_i) + ξ_i x_i + η_i y_i]

```

### The Knot Tensors

```

Define[kR_{i,j} = R_{i,j} // (b2t_i b2t_j) /. t_i|j → t,
kR_bar_{i,j} = R_bar_{i,j} // (b2t_i b2t_j) /. {t_i|j → t, T_i|j → T},
km_{i,j→k} = (t2b_i t2b_j) // dm_{i,j→k} //
b2t_k /. {t_k → t, T_k → T, τ_i|j → 0},
kC_i = C_i // b2t_i /. T_i → T,
kC_bar_i = C_bar_i // b2t_i /. T_i → T,
kKink_i = Kink_i // b2t_i /. {t_i → t, T_i → T},
kKink_bar_i = Kink_bar_i // b2t_i /. {t_i → t, T_i → T}]

```

### Some of the Atoms.

$\omega\beta$ /atoms

With  $A_i := e^{a_i}$  and  $B_i = e^{-b_i}$ ,

```
PP_ := Identity; $k = 1; ħ = γ = 1;
```

```
Column[
```

```

(# → (ε = ToExpression[#];
Normal@Simplify[ε[1] + ε[2] + Log@ε[3]])) & /@
{"dm_{i,j→k}", "dΔ_{i→j,k}", "dS_i", "R_{i,j}", "P_{i,j}"}]

```

$$\begin{aligned}
dm_{i,j \rightarrow k} &\rightarrow a_k (\alpha_i + \alpha_j) + b_k (\beta_i + \beta_j) + y_k \eta_i + \frac{y_k \eta_j}{\mathcal{A}_i} + \frac{x_k \xi_i}{\mathcal{A}_j} + \eta_j \xi_i - \\
&B_k \eta_j \xi_i + \frac{1}{4 \mathcal{A}_i \mathcal{A}_j} \in (2 y_k \eta_j (2 x_k \xi_i + \mathcal{A}_j (-2 \beta_i + (1 - 3 B_k) \eta_j \xi_i)) + \\
&\mathcal{A}_i \xi_i (x_k (-4 \beta_j + 2 (1 - 3 B_k) \eta_j \xi_i) + \\
&\mathcal{A}_j \eta_j (4 a_k B_k + (1 - 4 B_k + 3 B_k^2) \eta_j \xi_i)) + x_k \xi_j \\
d\Delta_{i \rightarrow j, k} &\rightarrow a_j \alpha_i + a_k \alpha_i + b_j \beta_i + b_k \beta_i + y_j \eta_i + B_j y_k \eta_i + \\
&x_j \xi_i + x_k \xi_i + \frac{1}{2} \in (B_j y_j y_k \eta_i^2 + x_k \xi_i (-2 a_j + x_j \xi_i)) \\
dS_i &\rightarrow -a_i \alpha_i - b_i \beta_i - \frac{\mathcal{A}_i (y_i \eta_i + (-\eta_i + B_i (x_i + \eta_i)) \xi_i)}{B_i} - \frac{1}{4 B_i^2} \\
&\in \mathcal{A}_i (\mathcal{A}_i \eta_i^2 (2 y_i^2 - 6 y_i \xi_i + 3 \xi_i^2) + B_i^2 \xi_i (4 a_i x_i + 2 x_i^2 \mathcal{A}_i \xi_i + \\
&2 x_i (2 \beta_i + \mathcal{A}_i \eta_i \xi_i) + \eta_i (-4 + 4 \beta_i + \mathcal{A}_i \eta_i \xi_i)) + \\
&2 B_i \eta_i (y_i (-2 + 2 \beta_i + 2 x_i \mathcal{A}_i \xi_i + \mathcal{A}_i \eta_i \xi_i) - \\
&\xi_i (-2 + 2 a_i + 2 \beta_i + 3 x_i \mathcal{A}_i \xi_i + 2 \mathcal{A}_i \eta_i \xi_i)) \\
R_{i,j} &\rightarrow a_j b_i + x_j y_i - \frac{1}{4} \in x_j^2 y_i^2 \\
P_{i,j} &\rightarrow \alpha_j \beta_i + \eta_i \xi_j + \frac{1}{4} \in \eta_i^2 \xi_j^2
\end{aligned}$$

$$\begin{aligned}
\mathcal{K} &= 2; \\
\text{Simplify} &[ \\
&R_{1,5} R_{6,2} R_{3,7} \overline{C_4} \overline{Kink_8} \overline{Kink_9} \overline{Kink_{10}} // dm_{1,2 \rightarrow 1} // dm_{1,3 \rightarrow 1} // \\
&dm_{1,4 \rightarrow 1} // dm_{1,5 \rightarrow 1} // dm_{1,6 \rightarrow 1} // dm_{1,7 \rightarrow 1} // dm_{1,8 \rightarrow 1} // \\
&dm_{1,9 \rightarrow 1} // dm_{1,10 \rightarrow 1}] /. v_{-1} \mapsto v \\
E_{\{\} \rightarrow \{1\}} &[0, 0, \frac{B}{1 - B + B^2} + \\
&\frac{B (-B + 2 B^2 + 2 B^4 + a (-1 + B - B^3 + B^4) - 2 x y - B^3 (3 + 2 x y)) \in}{(1 - B + B^2)^3} + \\
&\frac{1}{2 (1 - B + B^2)^5} \\
&B (4 B^8 + a^2 (1 - B + B^2)^2 (1 + B - 6 B^2 + B^3 + B^4) + 6 B^5 x^2 y^2 + \\
&2 x y (-2 + 3 x y) - B^7 (11 + 4 x y) - 2 B^2 (1 + 6 x^2 y^2) - \\
&2 B^4 (1 - 2 x y + 6 x^2 y^2) + B (1 + 8 x y + 6 x^2 y^2) + \\
&B^6 (6 + 8 x y + 6 x^2 y^2) + B^3 (4 + 4 x y + 30 x^2 y^2) + \\
&2 a (1 - B + B^2) (2 B^6 + 2 x y + 8 B^3 (1 + x y) - 5 B^2 (1 + 2 x y) - \\
&2 B^5 (1 + 2 x y) - B^4 (7 + 2 x y) + B (2 + 4 x y)) \in^2 + 0[\in]^3]
\end{aligned}$$

**A Quantum Algebra Example.**

$\omega\epsilon\beta/qa$

**Proto-Proposition**<sup>†0</sup> (with Jesse Frohlich and Roland van der Veen, near [Ma, Proposition 1.7.3]). Let  $H$  be a finite dimensional Hopf algebra and let  $U = H^{*cop} \otimes H$  be its Drinfel'd double, with  $R$ -matrix  $R \in H^* \otimes H \subset U \otimes U$ . Write  $R^{\dagger 1} = \sum \rho_a \otimes r_a$ , and let  $\langle \cdot | \cdot \rangle: H^* \otimes H \rightarrow \mathbb{F}$  be the duality pairing. Then the functional  $\int \in U^*$  defined by

$$\int \phi \otimes x := \sum \langle \phi \rho_a^{\dagger 2} | x r_a^{\dagger 3} \rangle$$

is a right<sup>†4</sup> integral in  $U^*$ . (Meaning  $\Delta_{jk}^i // \int_j = \int_i // \epsilon_k$  in  $\text{Hom}(U^{\otimes \{i\}} \rightarrow U^{\otimes \{k\}})$ ).

†0 A “proto-proposition” is something that will become a proposition once you figure out the correct statement. †1 Or did we want it to be  $R // S_1^2$ ? Or  $R // S_2^2$ ? †2 Or is it  $\rho_a \phi$ ? †3 Or is it  $r_a x$ ? †4 Or maybe “left”?


```

inp = E_{\{\} \rightarrow \{1\}} [3 a_1 b_1, 5 x_1 y_1, 1] // dm_{1,1 \rightarrow 1};
Table[
  HL@TrueQ[
    (inp // (SY_{i \rightarrow 1, 1, 2, 2} RR) // BM // AM // P_{1,2}) de_j \equiv
    (inp // \Delta\Delta // (SY_{i \rightarrow 1, 1, 2, 2} RR) // BM // AM // P_{1,2})],
  {\Delta\Delta, {d\Delta_{i \rightarrow i, j}, d\Delta_{i \rightarrow j, i}}, {AM, {dm_{2,4 \rightarrow 2}, dm_{4,2 \rightarrow 2}}},
  {BM, {dm_{1,3 \rightarrow 1}, dm_{3,1 \rightarrow 1}}},
  {RR, {R_{3,4}, R_{3,4} // dS_3 // dS_3, R_{3,4} // dS_4 // dS_4}}
] // MatrixForm
( (False False False) (False False True) )
( (False False False) (False False False) )
( (False False False) (False False False) )
( (False False True) (False False False) )

```

**A Knot Theory Example.**

$\omega\epsilon\beta/kt$

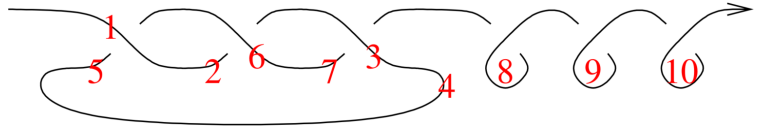

**KiW 43 Abstract** ( $\omega\epsilon\beta/kiw$ ). Whether or not you like the formulas on this page, they describe using the strongest truly computable knot invariant we know.  
**Observations.** • Separates the Rolfsen table; does better than

**References.**





































[BG] D. Bar-Natan and S. Garoufalidis, *On the Melvin-Morton-Rozansky conjecture*, Invent. Math. **125** (1996) 103–133.  
 [BV] D. Bar-Natan and R. van der Veen, *A Polynomial Time Knot Polynomial*, arXiv:1708.04853.  
 [Fa] L. Faddeev, *Modular Double of a Quantum Group*, arXiv:math/9912078.  
 [GR] S. Garoufalidis and L. Rozansky, *The Loop Expansion of the Kontsevich Integral, the Null-Move, and S-Equivalence*, arXiv:math.GT/0003187.  
 [Ma] S. Majid, *Foundations of Quantum Group Theory*, Cambridge University Press, 1995.  
 [MM] P. M. Melvin and H. R. Morton, *The coloured Jones function*, Commun. Math. Phys. **169** (1995) 501–520.  
 [Ov] A. Overbay, *Perturbative Expansion of the Colored Jones Polynomial*, University of North Carolina PhD thesis,  $\omega\epsilon\beta/Ov$ .  
 [Qu] C. Quesne, *Jackson’s q-Exponential as the Exponential of a Series*, arXiv:math-ph/0305003.  
 [Ro1] L. Rozansky, *A contribution of the trivial flat connection to the Jones polynomial and Witten’s invariant of 3d manifolds, I*, Comm. Math. Phys. **175-2** (1996) 275–296, arXiv:hep-th/9401061.  
 [Ro2] L. Rozansky, *The Universal R-Matrix, Burau Representation and the Melvin-Morton Expansion of the Colored Jones Polynomial*, Adv. Math. **134-1** (1998) 1–31, arXiv:q-alg/9604005.  
 [Ro3] L. Rozansky, *A Universal U(1)-RCC Invariant of Links and Rationality Conjecture*, arXiv:math/0201139.  
 [Za] D. Zagier, *The Dilogarithm Function*, in Cartier, Moussa, Julia, and Vanhove (eds) *Frontiers in Number Theory, Physics, and Geometry II*. Springer, Berlin, Heidelberg, and  $\omega\epsilon\beta/Za$ .





































Khovanov plus HOMFLY-PT on knots with up to 12 crossings (not tested beyond). • The degrees are bounded by the genus! •  $\rho_1$  vanishes for amphichiral knots. • Has a chance of detecting non-ribbonness ( $\omega\epsilon\beta/ind$ )!



































knot diag	$n_k^f$ $(\rho_1^f)^+$	Alexander's $\omega^+$ $(\rho_2^f)^+$	genus / ribbon unknotting # / amphi?	knot diag	$n_k^f$ $(\rho_1^f)^+$	Alexander's $\omega^+$ $(\rho_2^f)^+$	genus / ribbon unknotting # / amphi?	knot diag	$n_k^f$ $(\rho_1^f)^+$	Alexander's $\omega^+$ $(\rho_2^f)^+$	genus / ribbon unknotting # / amphi?
	$0_1^a$ 0	1 0	0 / ✓ 0 / ✓		$3_1^a$ T	T-1 $3T^3-12T^2+26T-38$	1 / ✗ 1 / ✗		$4_1^a$ 0	3-T $T^4-3T^3-15T^2+74T-110$	1 / ✗ 1 / ✓
	$5_1^a$ $2T^3+3T$	$T^2-T+1$ $5T^7-20T^6+55T^5-120T^4+217T^3-338T^2+450T-510$	2 / ✗ 2 / ✗		$5_2^a$ $5T-4$	2T-3 $-107T^4+120T^3-487T^2+1054T-1362$	1 / ✗ 1 / ✗		$6_1^a$ T-4	5-2T $147T^4-167T^3-293T^2+1098T-1598$	1 / ✓ 1 / ✗
	$6_2^a$ $T^3-4T^2+4T-4$	-T^2+3T-3 $3T^8-217T^7+497T^6+157T^5-4337T^4+15437T^3-34317T^2+54827T-6410$	2 / ✗ 1 / ✗		$6_3^a$ 0	T^2-3T+5 $47T^8-337T^7+1217T^6-2037T^5-1117T^4+14997T^3-42107T^2+71867T-8510$	2 / ✗ 1 / ✓		$7_1^a$ $3T^5+5T^3+6T$	T^3-T^2+T-1 $77T^{11}-287T^{10}+777T^9-1687T^8+3227T^7-5607T^6+8917T^5-13107T^4+17777T^3-22387T^2+26047T-2772$	3 / ✗ 3 / ✗
	$7_2^a$ $14T-16$	3T-5 $-129T^4+1177T^3-44217T^2+92267T-11718$	1 / ✗ 1 / ✗		$7_3^a$ $-9T^3+8T^2-16T+12$	2T^2-3T+3 $-187T^8+2087T^7-9177T^6+26667T^5-6049T^4+11283T^3-17671T^2+233567T-25736$	2 / ✗ 2 / ✗		$7_4^a$ $32-24T$	4T-7 $-352T^4+3616T^3-14378T^2+30700T-39188$	1 / ✗ 2 / ✗
	$7_5^a$ $9T^3-16T^2+29T-28$	2T^2-4T+5 $-18T^8+2647T^7-15487T^6+56807T^5-15107T^4+31152T^3-51476T^2+69252T-76414$	2 / ✗ 2 / ✗		$7_6^a$ $T^3-8T^2+19T-20$	-T^2+5T-7 $37T^8-357T^7+1287T^6+1057T^5-26107T^4+112257T^3-28031T^2+471867T-55946$	2 / ✗ 1 / ✗		$7_7^a$ 8-3T	T^2-5T+9 $47T^8-557T^7+3107T^6-8057T^5+867T^4+63497T^3-226867T^2+436107T-53622$	2 / ✗ 1 / ✗
	$8_1^a$ 5T-16	7-3T $42T^4+2157T^3-2542T^2+7562T-10542$	1 / ✗ 1 / ✗		$8_2^a$ $2T^5-8T^4+10T^3-12T^2+13T-12$	-T^3+3T^2-3T+3 $57T^{12}-397T^{11}+1197T^{10}-1397T^9-2497T^8+16607T^7-49597T^6+111317T^5-208137T^4+335957T^3-475217T^2+589887T-63556$	3 / ✗ 2 / ✗		$8_3^a$ 0	9-4T $224T^4-2247T^3-39107T^2+141007T-20364$	1 / ✗ 2 / ✓
	$8_4^a$ $3T^3-8T^2+6T-4$	-2T^2+5T-5 $54T^8-3447T^7+8657T^6-6507T^5-27237T^4+122437T^3-284617T^2+457927T-53540$	2 / ✗ 2 / ✗		$8_5^a$ $-2T^5+8T^4-13T^3+20T^2-22T+24$	-T^3+3T^2-4T+5 $57T^{12}-397T^{11}+1287T^{10}-1827T^9-2747T^8+24767T^7-8642T^6+21517T^5-429247T^4+717197T^3-1024487T^2+1264807T-135628$	3 / ✗ 2 / ✗		$8_6^a$ $5T^3-20T^2+28T-32$	-2T^2+6T-7 $38T^8-2167T^7+1127T^6+28807T^5-147877T^4+424447T^3-854157T^2+1284067T-146916$	2 / ✗ 2 / ✗
	$8_7^a$ $-T^5+4T^4-10T^3+12T^2-13T+12$	T^3-3T^2+5T-5 $87T^{12}-757T^{11}+3437T^{10}-9797T^9+18217T^8-17827T^7-16237T^6+120837T^5-330017T^4+645997T^3-1011947T^2+1314047T-143216$	3 / ✗ 1 / ✗		$8_8^a$ $-T^3+4T^2-12T+16$	2T^2-6T+9 $62T^8-5047T^7+17367T^6-24087T^5-37177T^4+264927T^3-684937T^2+1134187T-133180$	2 / ✓ 2 / ✗		$8_9^a$ 0	-T^3+3T^2-5T+7 $97T^{12}-87T^{11}+417T^{10}-13057T^9+28587T^8-41347T^7+21147T^6+82857T^5-319257T^4+692357T^3-1127737T^2+1485087T-162396$	3 / ✓ 1 / ✓
	$8_{10}^a$ $-T^5+4T^4-11T^3+16T^2-21T+20$	T^3-3T^2+6T-7 $87T^{12}-757T^{11}+3627T^{10}-11227T^9+23067T^8-25407T^7-21987T^6+188177T^5-543807T^4+1101037T^3-1756947T^2+2300807T-251346$	3 / ✗ 2 / ✗		$8_{11}^a$ $5T^3-24T^2+39T-44$	-2T^2+7T-9 $38T^8-2647T^7+3017T^6+35147T^5-217167T^4+687857T^3-1468987T^2+2278287T-263172$	2 / ✗ 1 / ✗		$8_{12}^a$ 0	T^2-7T+13 $47T^8-777T^7+5837T^6-19917T^5+9877T^4+173117T^3-718027T^2+1479147T-185846$	2 / ✗ 2 / ✓
	$8_{13}^a$ $-T^3+4T^2-14T+20$	2T^2-7T+11 $62T^8-5927T^7+23517T^6-39187T^5-42357T^4+400797T^3-1115337T^2+1915007T-227432$	2 / ✗ 1 / ✗		$8_{14}^a$ $5T^3-28T^2+57T-68$	-2T^2+8T-11 $38T^8-3127T^7+4447T^6+50967T^5-347777T^4+1163687T^3-2557507T^2+4016327T-465478$	2 / ✗ 1 / ✗		$8_{15}^a$ $21T^3-64T^2+120T-140$	3T^2-8T+11 $-1237T^8+21287T^7-152417T^6+661207T^5-1999997T^4+4519127T^3-7924147T^2+11017207T-1228222$	2 / ✗ 2 / ✗
	$8_{16}^a$ $T^5-6T^4+17T^3-28T^2+35T-36$	T^3-4T^2+8T-9 $87T^{12}-1007T^{11}+5987T^{10}-22057T^9+52927T^8-71647T^7-23807T^6+431007T^5-1373147T^4+2917507T^3-4787427T^2+6364887T-698666$	3 / ✗ 2 / ✗		$8_{17}^a$ 0	-T^3+4T^2-8T+11 $97T^{12}-1167T^{11}+7227T^{10}-28437T^9+76567T^8-136687T^7+111177T^6+219687T^5-1130867T^4+2737787T^3-4756227T^2+6490647T-717954$	3 / ✗ 1 / ✓		$8_{18}^a$ 0	-T^3+5T^2-10T+13 $97T^{12}-1457T^{11}+10757T^{10}-48427T^9+145047T^8-285607T^7+279577T^6+351957T^5-2252047T^4+5737977T^3-10216417T^2+14114847T-1567262$	3 / ✗ 2 / ✓
	$8_{19}^a$ $T^3-T^2+1$ $-3T^5-4T^2-3T$	T^3-T^2+1 $77T^{11}-197T^{10}+67T^9+487T^8-527T^7-917T^6+2117T^5+167T^4-4317T^3+289T^2+536T-1060$	3 / ✗ 3 / ✗		$8_{20}^a$ 4T-4	T^2-2T+3 $47T^8-227T^7+667T^6-1247T^5+527T^4+4787T^3-16527T^2+30147T-3640$	2 / ✓ 1 / ✗		$8_{21}^a$ $T^3-8T^2+16T-20$	-T^2+4T-5 $37T^8-287T^7+497T^6+3527T^5-24897T^4+81647T^3-175307T^2+270927T-31226$	2 / ✗ 1 / ✗

knot diag	$n_k^f$ $(\rho_1^f)^+$	Alexander's $\omega^+$ $(\rho_2^f)^+$	genus / ribbon unknotting # / amphi?	knot diag	$n_k^f$ $(\rho_1^f)^+$	Alexander's $\omega^+$ $(\rho_2^f)^+$	genus / ribbon unknotting # / amphi?
	$9_1^a$ $4T^7+7T^5+9T^3+10T$	T^4-T^3+T^2-T+1 $97T^{15}-367T^{14}+997T^{13}-2167T^{12}+4147T^{11}-7207T^{10}+11707T^9-18007T^8+26307T^7-36627T^6+48537T^5-61427T^4+74237T^3-85727T^2+94207T-9780$	4 / ✗ 4 / ✗		$9_2^a$ 30T-40	4T-7 $-728T^4+6088T^3-21946T^2+44788T-56420$	1 / ✗ 1 / ✗
	$9_3^a$ $-13T^5+12T^4-25T^3+20T^2-32T+24$	2T^3-3T^2+3T-3 $-267T^{12}+2967T^{11}-13117T^{10}+38387T^9-88677T^8+176137T^7-314077T^6+510617T^5-760857T^4+1042977T^3-1317797T^2+1528407T-160976$	3 / ✗ 3 / ✗		$9_4^a$ $23T^3-28T^2+46T-44$	3T^2-5T+5 $-2197T^8+19997T^7-83897T^6+237997T^5-528357T^4+967237T^3-1491217T^2+1946987T-213338$	2 / ✗ 2 / ✗
	$9_5^a$ 100-65T	6T-11 $-32347T^4+297927T^3-1132417T^2+2368187T-300294$	1 / ✗ 2 / ✗		$9_6^a$ $13T^5-24T^4+45T^3-52T^2+68T-64$	2T^3-4T^2+5T-5 $-267T^{12}+3767T^{11}-22127T^{10}+82807T^9-232497T^8+534887T^7-1060137T^6+1859907T^5-2928537T^4+4166737T^3-5370627T^2+6264887T-659788$	3 / ✗ 3 / ✗
	$9_7^a$ $23T^3-56T^2+99T-108$	3T^2-7T+9 $-2197T^8+27177T^7-157207T^6+583897T^5-1576987T^4+3292657T^3-5486577T^2+7416107T-819394$	2 / ✗ 2 / ✗		$9_8^a$ $3T^3-16T^2+29T-28$	-2T^2+8T-11 $547T^8-5527T^7+21247T^6-22167T^5-126417T^4+671127T^3-1721187T^2+2893047T-342134$	2 / ✗ 2 / ✗
	$9_9^a$ $13T^5-24T^4+55T^3-72T^2+98T-96$	2T^3-4T^2+6T-7 $-267T^{12}+3767T^{11}-22967T^{10}+93287T^9-289887T^8+735847T^7-1583997T^6+2959287T^5-4869167T^4+7120947T^3-9309937T^2+10920747T-1151564$	3 / ✗ 3 / ✗		$9_{10}^a$ $-40T^3+72T^2-114T+120$	4T^2-8T+9 $-6087T^8+67207T^7-337767T^6+1109287T^5-2734627T^4+5370407T^3-8627687T^2+11457847T-1259748$	2 / ✗ 2, 3 / ✗



knot diag	$n_k^l$ Alexander's $\omega^+$ ( $\rho_1^l$ ) <sup>+</sup>	genus / ribbon unknotting # / amphi?	knot diag	$n_k^l$ Alexander's $\omega^+$ ( $\rho_1^l$ ) <sup>+</sup>	genus / ribbon unknotting # / amphi?
	$9_{11}^a$ $-T^3+5T^2-7T+7$ $-2T^5+16T^4-41T^3+52T^2-66T+64$ $5T^{12}-65T^{11}+312T^{10}-463T^9-2042T^8+14588T^7-50444T^6+126967T^5-258750T^4+444545T^3-654213T^2+827220T-895336$	3 / ✗ 2 / ✗		$9_{12}^a$ $-2T^2+9T-13$ $5T^3-36T^2+84T-100$ $38T^8-312T^7+45T^6+9790T^5-60473T^4+202775T^3-453255T^2+722176T-841572$	2 / ✗ 1 / ✗
	$9_{13}^a$ $4T^2-9T+11$ $-40T^3+92T^2-154T+168$ $-608T^8+7680T^7-43650T^6+158004T^5-417129T^4+856533T^3-1412461T^2+1899222T-2095210$	2 / ✗ 2, 3 / ✗		$9_{14}^a$ $2T^2-9T+15$ $-T^3+8T^2-35T+60$ $62T^8-752T^7+3655T^6-7178T^5-9502T^4+97737T^3-294656T^2+531720T-642168$	2 / ✗ 1 / ✗
	$9_{15}^a$ $-2T^2+10T-15$ $-5T^3+40T^2-108T+136$ $38T^8-360T^7+208T^6+12328T^5-84103T^4+298764T^3-691161T^2+1121034T-1313504$	2 / ✗ 2 / ✗		$9_{16}^a$ $2T^3-5T^2+8T-9$ $-13T^5+36T^4-80T^3+120T^2-161T+168$ $-26T^{12}+456T^{11}-3331T^{10}+15554T^9-53941T^8+149494T^7-345106T^6+680900T^5-1167591T^4+1759576T^3-2347749T^2+2786466T-2949428$	3 / ✗ 3 / ✗
	$9_{17}^a$ $T^3-5T^2+9T-9$ $T^5-8T^4+23T^3-32T^2+28T-24$ $8T^{12}-125T^{11}+874T^{10}-3595T^9+9462T^8-15166T^7+6162T^6+47027T^5-181220T^4+415509T^3-716070T^2+982036T-1089796$	3 / ✗ 2 / ✗		$9_{18}^a$ $4T^2-10T+13$ $40T^3-108T^2+193T-220$ $-608T^8+8224T^7-51208T^6+201904T^5-570516T^4+1228920T^3-2087725T^2+2850858T-3159722$	2 / ✗ 2 / ✗
	$9_{19}^a$ $2T^2-10T+17$ $T^3-8T^2+20T-24$ $62T^8-840T^7+4536T^6-10352T^5-7041T^4+116428T^3-372683T^2+688198T-836608$	2 / ✗ 1 / ✗		$9_{20}^a$ $-T^3+5T^2-9T+11$ $2T^5-16T^4+47T^3-84T^2+117T-124$ $5T^{12}-65T^{11}+330T^{10}-577T^9-2439T^8+21482T^7-86959T^6+247237T^5-548658T^4+993841T^3-1502637T^2+1918532T-2080192$	3 / ✗ 2 / ✗
	$9_{21}^a$ $-2T^2+11T-17$ $-5T^3+44T^2-127T+164$ $38T^8-408T^7+493T^6+13802T^5-105014T^4+396685T^3-954552T^2+1583140T-1868380$	2 / ✗ 1 / ✗		$9_{22}^a$ $T^3-5T^2+10T-11$ $-T^5+8T^4-24T^3+38T^2-40T+36$ $8T^{12}-125T^{11}+893T^{10}-3824T^9+10605T^8-17902T^7+69906T^6+64299T^5-251573T^4+584313T^3-1012133T^2+1388650T-1540398$	3 / ✗ 1 / ✗
	$9_{23}^a$ $4T^2-11T+15$ $40T^3-128T^2+243T-288$ $-608T^8+9184T^7-62698T^6+265980T^5-794496T^4+1781111T^3-3107204T^2+4307350T-4797258$	2 / ✗ 2 / ✗		$9_{24}^a$ $-T^3+5T^2-10T+13$ $-4T^2+16T-20$ $9T^{12}-145T^{11}+1075T^{10}-4850T^9+14600T^8-29112T^7+29921T^6+30667T^5-218916T^4+570933T^3-1029833T^2+1433476T-1595654$	3 / ✗ 1 / ✗
	$9_{25}^a$ $-3T^2+12T-17$ $12T^3-70T^2+153T-188$ $174T^8-1200T^7-1027T^6+42696T^5-235512T^4+740956T^3-1585864T^2+2460360T-2841166$	2 / ✗ 2 / ✗		$9_{26}^a$ $T^3-5T^2+11T-13$ $-T^5+8T^4-31T^3+64T^2-85T+92$ $8T^{12}-125T^{11}+900T^{10}-3861T^9+10351T^8-14356T^7-12391T^6+132473T^5-427732T^4+939309T^3-1588046T^2+2154028T-2381116$	3 / ✗ 1 / ✗
	$9_{27}^a$ $-T^3+5T^2-11T+15$ $T^3-8T^2+24T-32$ $9T^{12}-145T^{11}+1096T^{10}-5115T^9+16088T^8-33784T^7+37362T^6+34075T^5-273854T^4+743153T^3-1374545T^2+1941332T-2171344$	3 / ✓ 1 / ✗		$9_{28}^a$ $T^3-5T^2+12T-15$ $T^5-8T^4+30T^3-68T^2+105T-120$ $8T^{12}-125T^{11}+923T^{10}-4138T^9+11800T^8-18092T^7-11101T^6+159415T^5-543916T^4+1228781T^3-2107809T^2+2877256T-3186008$	3 / ✗ 1 / ✗
	$9_{29}^a$ $T^3-5T^2+12T-15$ $T^5-8T^4+26T^3-48T^2+59T-56$ $8T^{12}-125T^{11}+931T^{10}-4290T^9+13096T^8-24848T^7+13335T^6+94047T^5-409576T^4+1010237T^3-1816557T^2+2543836T-2840192$	3 / ✗ 2 / ✗		$9_{30}^a$ $-T^3+5T^2-12T+17$ $2T^3-10T^2+25T-32$ $9T^{12}-145T^{11}+1117T^{10}-5376T^9+17533T^8-38170T^7+43292T^6+43619T^5-347397T^4+957881T^3-1794189T^2+2553442T-2863228$	3 / ✗ 1 / ✗
	$9_{31}^a$ $T^3-5T^2+13T-17$ $T^5-8T^4+33T^3-80T^2+132T-152$ $8T^{12}-125T^{11}+938T^{10}-4303T^9+12544T^8-19138T^7-17200T^6+204143T^5-703180T^4+1617365T^3-2818190T^2+3886636T-4319004$	3 / ✗ 2 / ✗		$9_{32}^a$ $T^3-6T^2+14T-17$ $-T^5+10T^4-42T^3+94T^2-133T+148$ $8T^{12}-150T^{11}+1269T^{10}-6297T^9+19455T^8-32720T^7-11156T^6+260282T^5-930836T^4+2153618T^3-3750358T^2+5165114T-5736454$	3 / ✗ 2 / ✗
	$9_{33}^a$ $-T^3+6T^2-14T+19$ $T^3-10T^2+30T-40$ $9T^{12}-174T^{11}+1539T^{10}-8207T^9+28913T^8-67184T^7+84077T^6+55866T^5-581640T^4+1664798T^3-3166838T^2+4539202T-5100726$	3 / ✗ 1 / ✗		$9_{34}^a$ $-T^3+6T^2-16T+23$ $3T^3-18T^2+43T-56$ $9T^{12}-174T^{11}+1581T^{10}-8831T^9+32988T^8-81774T^7+109631T^6+73248T^5-829341T^4+2480938T^3-4869197T^2+7112552T-8043256$	3 / ✗ 1 / ✗
	$9_{35}^a$ $7T-13$ $90T-144$ $-6355T^4+58861T^3-224539T^2+470386T-596734$	1 / ✗ 2, 3 / ✗		$9_{36}^a$ $-T^3+5T^2-8T+9$ $-2T^5+16T^4-44T^3+66T^2-87T+88$ $5T^{12}-65T^{11}+321T^{10}-532T^9-2081T^8+17066T^7-64846T^6+175611T^5-376739T^4+668001T^3-998037T^2+1267342T-1372104$	3 / ✗ 2 / ✗
	$9_{37}^a$ $2T^2-11T+19$ $T^3-8T^2+22T-28$ $62T^8-928T^7+5487T^6-13814T^5-6681T^4+154867T^3-520239T^2+983348T-1204192$	2 / ✗ 2 / ✗		$9_{38}^a$ $5T^2-14T+19$ $62T^3-204T^2+382T-452$ $-1414T^8+22122T^7-153560T^6+657340T^5-1976110T^4+4454362T^3-7806448T^2+10855582T-12103772$	2 / ✗ 2, 3 / ✗
	$9_{39}^a$ $-3T^2+14T-21$ $-12T^3+84T^2-210T+268$ $174T^8-1442T^7-690T^6+59068T^5-366222T^4+1247214T^3-2815796T^2+4505578T-5255776$	2 / ✗ 1 / ✗		$9_{40}^a$ $T^3-7T^2+18T-23$ $T^5-12T^4+57T^3-144T^2+229T-264$ $8T^{12}-175T^{11}+1712T^{10}-9738T^9+34250T^8-66108T^7-11148T^6+553509T^5-2149560T^4+5230963T^3-9406248T^2+13187800T-14730526$	3 / ✗ 2 / ✗
	$9_{41}^a$ $3T^2-12T+19$ $3T^3-20T^2+70T-108$ $309T^8-3288T^7+13885T^6-20928T^5-55179T^4+378100T^3-1035810T^2+1787808T-2129794$	2 / ✓ 2 / ✗		$9_{42}^a$ $-T^2+2T-1$ $-T^3+2T^2+T-4$ $3T^8-14T^7+32T^6-96T^5+265T^4-294T^3-498T^2+2170T-3128$	2 / ✗ 1 / ✗
	$9_{43}^a$ $-T^3+3T^2-2T+1$ $-2T^5+8T^4-7T^3+2T^2-5T+4$ $5T^{12}-39T^{11}+110T^{10}-108T^9-115T^8+570T^7-1477T^6+3453T^5-6651T^4+10951T^3-17188T^2+24718T-28462$	3 / ✗ 2 / ✗		$9_{44}^a$ $T^2-4T+7$ $-2T^2+9T-12$ $47T^8-48T^7+237T^6-496T^5-346T^4+4988T^3-15044T^2+26768T-32126$	2 / ✗ 1 / ✗
	$9_{45}^a$ $-T^2+6T-9$ $T^3-14T^2+47T-60$ $37T^8-42T^7+78T^6+1376T^5-11135T^4+42574T^3-102522T^2+169806T-200284$	2 / ✗ 1 / ✗		$9_{46}^a$ $5-2T$ $3T-12$ $-2T^4+160T^3-1125T^2+3082T-4222$	1 / ✓ 2 / ✗

knot diag	$n_k^l$ Alexander's $\omega^+$ $(\rho_1)^+$	genus / ribbon unknotting # / amphi?	knot diag	$n_k^l$ Alexander's $\omega^+$ $(\rho_1)^+$	genus / ribbon unknotting # / amphi?
	$9_{47}^a$ $T^3 - 4T^2 + 6T - 5$ $-T^5 + 6T^4 - 15T^3 + 16T^2 - 10T + 12$ $87^{12} - 1007^{11} + 5607^{10} - 18417^9 + 38477^8 - 47107^7 - 4276^6 + 174947^5 - 554477^4 + 170587^3 - 1937497^2 + 2613867 - 288924$	3 / ✗ 2 / ✗		$9_{48}^a$ $-T^2 + 7T - 11$ $-T^3 + 12T^2 - 42T + 52$ $37^8 - 497^7 + 2437^6 + 2677^5 - 80517^4 + 404997^3 - 1121677^2 + 1998507 - 241202$	2 / ✗ 2 / ✗
	$9_{49}^a$ $3T^2 - 6T + 7$ $-21T^3 + 38T^2 - 61T + 60$ $-1237^8 + 16147^7 - 87447^6 + 299287^5 - 758737^4 + 1527147^3 - 2507947^2 + 3382387 - 373944$	2 / ✗ 3 / ✗		$10_1^a$ $9 - 4T$ $14T - 40$ $-247^4 + 21367^3 - 134307^2 + 348607 - 47068$	1 / ✗ 1 / ✗
	$10_2^a$ $-T^4 + 3T^3 - 3T^2 + 3T - 3$ $3T^7 - 12T^6 + 16T^5 - 20T^4 + 24T^3 - 24T^2 + 27T - 24$ $77^{16} - 57T^{15} + 189T^{14} - 2937^{13} - 55T^{12} + 16287^{11} - 55437^{10} + 132667^9 - 265897^8 + 474687^7 - 774157^6 + 1165497^5 - 1629117^4 + 2123257^3 - 2584137^2 + 2925807 - 305480$	4 / ✗ 3 / ✗		$10_3^a$ $13 - 6T$ $11T - 28$ $870T^4 + 1288T^3 - 277957^2 + 857187 - 120138$	1 / ✓ 2 / ✗
	$10_4^a$ $-3T^2 + 7T - 7$ $4T^3 - 8T^2 + T + 8$ $2947^8 - 18077^7 + 45707^6 - 43057^5 - 95507^4 + 495817^3 - 1174567^2 + 1893307 - 221294$	2 / ✗ 2 / ✗		$10_5^a$ $T^4 - 3T^3 + 5T^2 - 5T + 5$ $-2T^7 + 8T^6 - 20T^5 + 28T^4 - 36T^3 + 36T^2 - 39T + 36$ $127^{16} - 117T^{15} + 5657^{14} - 17577^{13} + 38477^{12} - 59607^{11} + 53817^{10} + 29687^9 - 266257^8 + 750087^7 - 1574157^6 + 2791737^5 - 4369997^4 + 6152977^3 - 7853287^2 + 9099167 - 955948$	4 / ✗ 2 / ✗
	$10_6^a$ $-2T^3 + 6T^2 - 7T + 7$ $9T^5 - 36T^4 + 56T^3 - 72T^2 + 81T - 84$ $627^{12} - 4087^{11} + 7127^{10} + 22807^9 - 174937^8 + 606527^7 - 1534927^6 + 3190487^5 - 5695847^4 + 8903977^3 - 12286577^2 + 14961507 - 1599330$	3 / ✗ 3 / ✗		$10_7^a$ $-3T^2 + 11T - 15$ $14T^3 - 72T^2 + 135T - 160$ $1147^8 - 2757^7 - 58407^6 + 517397^5 - 2224927^4 + 6264257^3 - 12673487^2 + 19144107 - 2193462$	2 / ✗ 1 / ✗
	$10_8^a$ $-2T^3 + 5T^2 - 5T + 5$ $7T^5 - 20T^4 + 23T^3 - 28T^2 + 26T - 24$ $947^{12} - 6727^{11} + 21157^{10} - 36787^9 + 25357^8 + 64537^7 - 306457^6 + 783857^5 - 1548957^4 + 2566017^3 - 3675257^2 + 4585007 - 494524$	3 / ✗ 2 / ✗		$10_9^a$ $-T^4 + 3T^3 - 5T^2 + 7T - 7$ $-T^7 + 4T^6 - 10T^5 + 20T^4 - 25T^3 + 28T^2 - 28T + 28$ $157^{16} - 1537^{15} + 7877^{14} - 27277^{13} + 70847^{12} - 144047^{11} + 228867^{10} - 261347^9 + 115407^8 + 393327^7 - 1468667^6 + 3251157^5 - 5710777^4 + 856947^3 - 11310137^2 + 13306687 - 1403980$	4 / ✗ 1 / ✗
	$10_{10}^a$ $3T^2 - 11T + 17$ $-5T^3 + 24T^2 - 71T + 100$ $2857^8 - 27357^7 + 100787^6 - 94797^5 - 640007^4 + 3272537^3 - 8273777^2 + 13781307 - 1624314$	2 / ✗ 1 / ✗		$10_{11}^a$ $-4T^2 + 11T - 13$ $16T^3 - 52T^2 + 68T - 72$ $7367^8 - 46727^7 + 96347^6 + 111327^5 - 1253677^4 + 4131217^3 - 8730957^2 + 13369747 - 1536906$	2 / ✗ 2, 3 / ✗
	$10_{12}^a$ $2T^3 - 6T^2 + 10T - 11$ $-5T^5 + 20T^4 - 50T^3 + 72T^2 - 89T + 92$ $1187^{12} - 10807^{11} + 47487^{10} - 126247^9 + 194147^8 - 20727^7 - 885077^6 + 3208367^5 - 7504537^4 + 13669227^3 - 20534817^2 + 26046387 - 2816934$	3 / ✗ 2 / ✗		$10_{13}^a$ $2T^2 - 13T + 23$ $T^3 - 12T^2 + 51T - 84$ $627^8 - 10887^7 + 73677^6 - 205867^5 - 133567^4 + 2865097^3 - 10050987^2 + 19542807 - 2416160$	2 / ✗ 2 / ✗
	$10_{14}^a$ $-2T^3 + 8T^2 - 12T + 13$ $9T^5 - 52T^4 + 119T^3 - 180T^2 + 225T - 236$ $627^{12} - 5847^{11} + 17207^{10} + 28167^9 - 428487^8 + 1954007^7 - 5941777^6 + 14076887^5 - 27536047^4 + 45751547^3 - 65450787^2 + 81068207 - 8706026$	3 / ✗ 2 / ✗		$10_{15}^a$ $2T^3 - 6T^2 + 9T - 9$ $-3T^5 + 12T^4 - 24T^3 + 24T^2 - 17T + 12$ $1347^{12} - 12727^{11} + 57927^{10} - 165207^9 + 317657^8 - 376367^7 + 23967^6 + 1201767^5 - 3713687^4 + 7528737^3 - 11950437^2 + 15601907 - 1702986$	3 / ✗ 2 / ✗
	$10_{16}^a$ $-4T^2 + 12T - 15$ $-16T^3 + 56T^2 - 76T + 80$ $7367^8 - 52487^7 + 129447^6 + 65287^5 - 1441627^4 + 5222007^3 - 11553707^2 + 18092287 - 2093696$	2 / ✗ 2 / ✗		$10_{17}^a$ $T^4 - 3T^3 + 5T^2 - 7T + 9$ $0$ $167^{16} - 1657^{15} + 8617^{14} - 30437^{13} + 81737^{12} - 175147^{11} + 301627^{10} - 399587^9 + 326667^8 + 139987^7 - 1250817^6 + 3177437^5 - 5884817^4 + 9045697^3 - 12070207^2 + 14265567 - 1506972$	4 / ✗ 1 / ✓
	$10_{18}^a$ $-4T^2 + 14T - 19$ $16T^3 - 68T^2 + 121T - 140$ $7367^8 - 62407^7 + 177367^6 + 110887^5 - 2456487^4 + 9301687^3 - 21092017^2 + 33387067 - 3874682$	2 / ✗ 1 / ✗		$10_{19}^a$ $2T^3 - 7T^2 + 11T - 11$ $3T^5 - 16T^4 + 35T^3 - 40T^2 + 30T - 24$ $1347^{12} - 14807^{11} + 76417^{10} - 241947^9 + 508557^8 - 660077^7 + 123237^6 + 2013577^5 - 6652877^4 + 13977977^3 - 22710857^2 + 30061287 - 3296368$	3 / ✗ 2 / ✗
	$10_{20}^a$ $-3T^2 + 9T - 11$ $14T^3 - 56T^2 + 88T - 104$ $1147^8 - 1537^7 - 47837^6 + 344257^5 - 1287117^4 + 3274357^3 - 6187047^2 + 8990667 - 1017366$	2 / ✗ 2 / ✗		$10_{21}^a$ $-2T^3 + 7T^2 - 9T + 9$ $9T^5 - 44T^4 + 80T^3 - 104T^2 + 121T - 124$ $627^{12} - 4967^{11} + 12037^{10} + 20787^9 - 244567^8 + 971637^7 - 2678787^6 + 5920417^5 - 11067387^4 + 17895917^3 - 25257327^2 + 31137527 - 3341184$	3 / ✗ 2 / ✗
	$10_{22}^a$ $-2T^3 + 6T^2 - 10T + 13$ $-T^5 + 4T^4 - 10T^3 + 24T^2 - 37T + 44$ $1427^{12} - 13687^{11} + 65247^{10} - 201207^9 + 427907^8 - 579287^7 + 169197^6 + 1587007^5 - 5407077^4 + 11302947^3 - 18096437^2 + 23631147 - 2577418$	3 / ✓ 2 / ✗		$10_{23}^a$ $2T^3 - 7T^2 + 13T - 15$ $-5T^5 + 24T^4 - 67T^3 + 108T^2 - 137T + 144$ $1187^{12} - 12727^{11} + 65417^{10} - 204027^9 + 384437^8 - 219457^7 - 1324427^6 + 5943357^5 - 15304207^4 + 29603637^3 - 46221937^2 + 59920487 - 6526360$	3 / ✗ 1 / ✗
	$10_{24}^a$ $-4T^2 + 14T - 19$ $24T^3 - 116T^2 + 221T - 268$ $4167^8 - 15687^7 - 132247^6 + 1369287^5 - 6041247^4 + 17010087^3 - 34146737^2 + 51187147 - 5846946$	2 / ✗ 2 / ✗		$10_{25}^a$ $-2T^3 + 8T^2 - 14T + 17$ $9T^5 - 52T^4 + 131T^3 - 232T^2 + 314T - 344$ $627^{12} - 5847^{11} + 18567^{10} + 22647^9 - 470527^8 + 2412887^7 - 8095417^6 + 20680167^5 - 42700107^4 + 73479307^3 - 107233317^2 + 134062067 - 14434208$	3 / ✗ 2 / ✗
	$10_{26}^a$ $-2T^3 + 7T^2 - 13T + 17$ $-T^5 + 4T^4 - 10T^3 + 28T^2 - 49T + 60$ $1427^{12} - 16007^{11} + 88237^{10} - 310587^9 + 749647^8 - 1178977^7 + 670647^6 + 2559977^5 - 10476007^4 + 23603957^3 - 39478887^2 + 52812887 - 5805248$	3 / ✗ 1 / ✗		$10_{27}^a$ $2T^3 - 8T^2 + 16T - 19$ $5T^5 - 28T^4 + 87T^3 - 164T^2 + 229T - 252$ $1187^{12} - 14647^{11} + 85367^{10} - 297927^9 + 620967^8 - 396967^7 - 2421957^6 + 11518487^5 - 30781407^4 + 60989107^3 - 96619407^2 + 126212407 - 13779050$	3 / ✗ 1 / ✗
	$10_{28}^a$ $4T^2 - 13T + 19$ $-8T^3 + 36T^2 - 100T + 136$ $9287^8 - 78727^7 + 261747^6 - 225887^5 - 1422957^4 + 6891137^3 - 16763917^2 + 27289987 - 3192146$	2 / ✗ 2 / ✗		$10_{29}^a$ $T^3 - 7T^2 + 15T - 17$ $T^5 - 12T^4 + 52T^3 - 104T^2 + 124T - 128$ $87^{12} - 1757^{11} + 16597^{10} - 89137^9 + 292527^8 - 542927^7 + 106867^6 + 2909897^5 - 11266637^4 + 26732117^3 - 47234987^2 + 65665727 - 7317656$	3 / ✗ 2 / ✗
	$10_{30}^a$ $-4T^2 + 17T - 25$ $24T^3 - 148T^2 + 345T - 440$ $4167^8 - 20487^7 - 174907^6 + 2199967^5 - 11018947^4 + 33969077^3 - 72455107^2 + 112437347 - 12988226$	2 / ✗ 1 / ✗		$10_{31}^a$ $4T^2 - 14T + 21$ $-4T^2 + 9T - 12$ $9927^8 - 94407^7 + 369367^6 - 591367^5 - 726247^4 + 6233047^3 - 16918997^2 + 28675507 - 3391374$	2 / ✗ 1 / ✗
	$10_{32}^a$ $-2T^3 + 8T^2 - 15T + 19$ $T^5 - 4T^4 + 13T^3 - 40T^2 + 78T - 96$ $1427^{12} - 18327^{11} + 112047^{10} - 426887^9 + 1099097^8 - 1843847^7 + 1248317^6 + 3607827^5 - 16153917^4 + 37595857^3 - 64048907^2 + 86553607 - 9545252$	3 / ✗ 1 / ✗		$10_{33}^a$ $4T^2 - 16T + 25$ $0$ $9927^8 - 108167^7 + 478567^6 - 883367^5 - 844027^4 + 9203207^3 - 26553407^2 + 46409127 - 5542372$	2 / ✗ 1 / ✓

knot diag	$n_k^+$ Alexander's $\omega^+$ $(\rho_1)^+$	genus / ribbon unknotting # / amphi?	knot diag	$n_k^+$ Alexander's $\omega^+$ $(\rho_1)^+$	genus / ribbon unknotting # / amphi?
	$10_{34}^a$ $3T^2 - 9T + 13$ $-5T^3 + 20T^2 - 52T + 68$ $285T^8 - 2205T^7 + 6601T^6 - 3429T^5 - 43369T^4 + 185703T^3 - 431857T^2 + 687874T - 799218$	2 / ✗ 2 / ✗		$10_{35}^a$ $2T^2 - 12T + 21$ $-T^3 + 12T^2 - 47T + 76$ $62T^8 - 1000T^7 + 6244T^6 - 15744T^5 - 15707T^4 + 232680T^3 - 775840T^2 + 1474372T - 1810118$	2 / ✓ 2 / ✗
	$10_{36}^a$ $-3T^2 + 13T - 19$ $14T^3 - 88T^2 + 208T - 264$ $114T^8 - 397T^7 - 7597T^6 + 81141T^5 - 393441T^4 + 1198967T^3 - 2544952T^2 + 3941362T - 4550398$	2 / ✗ 2 / ✗		$10_{37}^a$ $4T^2 - 13T + 19$ 0 $992T^8 - 8736T^7 + 31914T^6 - 47212T^5 - 64499T^4 + 497921T^3 - 1308755T^2 + 2181630T - 2566522$	2 / ✗ 2 / ✓
	$10_{38}^a$ $-4T^2 + 15T - 21$ $24T^3 - 128T^2 + 270T - 336$ $416T^8 - 1632T^7 - 16122T^6 + 172460T^5 - 788845T^4 + 2280037T^3 - 4653713T^2 + 7038342T - 8061882$	2 / ✗ 2 / ✗		$10_{39}^a$ $-2T^3 + 8T^2 - 13T + 15$ $9T^5 - 52T^4 + 125T^3 - 204T^2 + 263T - 280$ $62T^{12} - 584T^{11} + 1788T^{10} + 2480T^9 - 44191T^8 + 213488T^7 - 683173T^6 + 1684054T^5 - 3393468T^4 + 5753447T^3 - 8330571T^2 + 10379080T - 11164828$	3 / ✗ 2 / ✗
	$10_{40}^a$ $2T^3 - 8T^2 + 17T - 21$ $-5T^5 + 28T^4 - 89T^3 + 176T^2 - 258T + 288$ $118T^{12} - 1464T^{11} + 8692T^{10} - 31256T^9 + 67987T^8 - 49624T^7 - 257955T^6 + 1301482T^5 - 3582545T^4 + 7240253T^3 - 11620382T^2 + 15292356T - 16735336$	3 / ✗ 2 / ✗		$10_{41}^a$ $T^3 - 7T^2 + 17T - 21$ $T^5 - 12T^4 + 54T^3 - 120T^2 + 157T - 164$ $8T^{12} - 175T^{11} + 1697T^{10} - 9543T^9 + 33561T^8 - 69114T^7 + 29117T^6 + 35412T^5 - 1527139T^4 + 3836499T^3 - 7019042T^2 + 9942516T - 11145016$	3 / ✗ 2 / ✗
	$10_{42}^a$ $-T^3 + 7T^2 - 19T + 27$ $2T^3 - 8T^2 + 11T - 12$ $9T^{12} - 203T^{11} + 2093T^{10} - 12971T^9 + 52885T^8 - 142268T^7 + 214987T^6 + 60931T^5 - 1368859T^4 + 4365895T^3 - 8815357T^2 + 13058404T - 14831092$	3 / ✓ 1 / ✗		$10_{43}^a$ $-T^3 + 7T^2 - 17T + 23$ 0 $9T^{12} - 203T^{11} + 2051T^{10} - 12253T^9 + 47594T^8 - 120962T^7 + 170450T^6 + 61017T^5 - 1045911T^4 + 3175271T^3 - 6209661T^2 + 9025932T - 10186676$	3 / ✗ 2 / ✓
	$10_{44}^a$ $T^3 - 7T^2 + 19T - 25$ $T^5 - 12T^4 + 56T^3 - 140T^2 + 220T - 248$ $8T^{12} - 175T^{11} + 1735T^{10} - 10157T^9 + 37586T^8 - 81160T^7 + 29232T^6 + 500937T^5 - 2197451T^4 + 5635115T^3 - 10448058T^2 + 14900236T - 16735696$	3 / ✗ 1 / ✗		$10_{45}^a$ $-T^3 + 7T^2 - 21T + 31$ 0 $9T^{12} - 203T^{11} + 2135T^{10} - 13689T^9 + 58324T^8 - 165246T^7 + 266640T^6 + 52413T^5 - 1738539T^4 + 5821367T^3 - 12123077T^2 + 18290148T - 20900556$	3 / ✗ 2 / ✓
	$10_{46}^a$ $-T^4 + 3T^3 - 4T^2 + 5T - 5$ $-3T^7 + 12T^6 - 21T^5 + 34T^4 - 43T^3 + 52T^2 - 55T + 56$ $7T^{16} - 57T^{15} + 204T^{14} - 382T^{13} + 69T^{12} + 2247T^{11} - 9674T^{10} + 27287T^9 - 61957T^8 + 121378T^7 - 211961T^6 + 335438T^5 - 485235T^4 + 644818T^3 - 789365T^2 + 891215T - 928064$	4 / ✗ 3 / ✗		$10_{47}^a$ $T^4 - 3T^3 + 6T^2 - 7T + 7$ $-2T^7 + 8T^6 - 23T^5 + 38T^4 - 56T^3 + 60T^2 - 68T + 64$ $12T^{16} - 117T^{15} + 598T^{14} - 2030T^{13} + 4959T^{12} - 8715T^{11} + 9312T^{10} + 2921T^9 - 44823T^8 + 139602T^7 - 312112T^6 + 579182T^5 - 93656T^4 + 1347538T^3 - 1741633T^2 + 2029805T - 2135930$	4 / ✗ 2, 3 / ✗
	$10_{48}^a$ $T^4 - 3T^3 + 6T^2 - 9T + 11$ $T^5 - 2T^4 + 2T^3 - 3T + 4$ $16T^{16} - 165T^{15} + 906T^{14} - 3452T^{13} + 10069T^{12} - 23423T^{11} + 43765T^{10} - 63343T^9 + 59588T^8 + 82327T^7 - 192505T^6 + 537134T^5 - 1048176T^4 + 1669528T^3 - 2281994T^2 + 2735109T - 2902594$	4 / ✓ 2 / ✗		$10_{49}^a$ $3T^3 - 8T^2 + 12T - 13$ $30T^5 - 94T^4 + 196T^3 - 292T^2 + 372T - 392$ $-177T^{12} + 3028T^{11} - 22080T^{10} + 101361T^9 - 341354T^8 + 914348T^7 - 2044469T^6 + 3931812T^5 - 6622778T^4 + 9874270T^3 - 13105110T^2 + 15522532T - 16422794$	3 / ✗ 3 / ✗
	$10_{50}^a$ $-2T^3 + 7T^2 - 11T + 13$ $-9T^5 + 44T^4 - 94T^3 + 150T^2 - 186T + 200$ $62T^{12} - 496T^{11} + 1283T^{10} + 2094T^9 - 29732T^8 + 134301T^7 - 412809T^6 + 990903T^5 - 1959941T^4 + 3278621T^3 - 4702408T^2 + 5824956T - 6253664$	3 / ✗ 2 / ✗		$10_{51}^a$ $2T^3 - 7T^2 + 15T - 19$ $-5T^5 + 24T^4 - 73T^3 + 134T^2 - 194T + 212$ $118T^{12} - 1272T^{11} + 6813T^{10} - 22602T^9 + 45771T^8 - 28275T^7 - 180411T^6 + 857569T^5 - 2306697T^4 + 4602641T^3 - 7332665T^2 + 9612128T - 10506256$	3 / ✗ 2, 3 / ✗
	$10_{52}^a$ $2T^3 - 7T^2 + 13T - 15$ $-3T^5 + 16T^4 - 37T^3 + 50T^2 - 49T + 44$ $134T^{12} - 1480T^{11} + 7961T^{10} - 27058T^9 + 62159T^8 - 88937T^7 + 22042T^6 + 296843T^5 - 1040240T^4 + 2254967T^3 - 3720017T^2 + 4952400T - 5437448$	3 / ✗ 2 / ✗		$10_{53}^a$ $6T^2 - 18T + 25$ $93T^3 - 346T^2 + 680T - 828$ $-3642T^8 + 58248T^7 - 417976T^6 + 1846212T^5 - 5694639T^4 + 13084936T^3 - 23231163T^2 + 32545278T - 36374532$	2 / ✗ 2, 3 / ✗
	$10_{54}^a$ $2T^3 - 6T^2 + 10T - 11$ $-3T^5 + 12T^4 - 24T^3 + 26T^2 - 21T + 16$ $134T^{12} - 1272T^{11} + 5964T^{10} - 17880T^9 + 36606T^8 - 46740T^7 + 6565T^6 + 150576T^5 - 487825T^4 + 1010638T^3 - 1619593T^2 + 2120978T - 2316318$	3 / ✗ 2, 3 / ✗		$10_{55}^a$ $5T^2 - 15T + 21$ $66T^3 - 246T^2 + 488T - 596$ $-1966T^8 + 30491T^7 - 215627T^6 + 945597T^5 - 2905831T^4 + 6662951T^3 - 11814712T^2 + 16540014T - 18481854$	2 / ✗ 2 / ✗
	$10_{56}^a$ $-2T^3 + 8T^2 - 14T + 17$ $-9T^5 + 52T^4 - 133T^3 + 234T^2 - 312T + 340$ $62T^{12} - 584T^{11} + 1800T^{10} + 2840T^9 - 49588T^8 + 247616T^7 - 819257T^6 + 2077408T^5 - 4277830T^4 + 7364010T^3 - 10765639T^2 + 13481990T - 14525656$	3 / ✗ 2 / ✗		$10_{57}^a$ $2T^3 - 8T^2 + 18T - 23$ $-5T^5 + 28T^4 - 93T^3 + 194T^2 - 300T + 340$ $118T^{12} - 1464T^{11} + 8808T^{10} - 32264T^9 + 71276T^8 - 49320T^7 - 305843T^6 + 1537376T^5 - 4286854T^4 + 8774390T^3 - 14221383T^2 + 18829374T - 20648444$	3 / ✗ 2 / ✗
	$10_{58}^a$ $3T^2 - 16T + 27$ $3T^3 - 28T^2 + 94T - 140$ $309T^8 - 4384T^7 + 24039T^6 - 49896T^5 - 90763T^4 + 864784T^3 - 2647834T^2 + 4837480T - 5867454$	2 / ✗ 2 / ✗		$10_{59}^a$ $T^3 - 7T^2 + 18T - 23$ $-T^5 + 12T^4 - 55T^3 + 128T^2 - 181T + 196$ $8T^{12} - 175T^{11} + 1716T^{10} - 9858T^9 + 35706T^8 - 76124T^7 + 33704T^6 + 412653T^5 - 1824096T^4 + 4655939T^3 - 8596644T^2 + 12230816T - 13727286$	3 / ✗ 1 / ✗
	$10_{60}^a$ $-T^3 + 7T^2 - 20T + 29$ $5T^3 - 40T^2 + 122T - 176$ $9T^{12} - 203T^{11} + 2114T^{10} - 13338T^9 + 55732T^8 - 154496T^7 + 241898T^6 + 66137T^5 - 1621594T^4 + 5326603T^3 - 10989858T^2 + 16499428T - 18824860$	3 / ✗ 1 / ✗		$10_{61}^a$ $-2T^3 + 5T^2 - 6T + 7$ $-7T^5 + 20T^4 - 27T^3 + 36T^2 - 35T + 36$ $94T^{12} - 672T^{11} + 2231T^{10} - 4382T^9 + 4108T^8 + 6320T^7 - 40187T^6 + 113296T^5 - 235714T^4 + 400470T^3 - 576529T^2 + 714816T - 767686$	3 / ✗ 2, 3 / ✗
	$10_{62}^a$ $T^4 - 3T^3 + 6T^2 - 8T + 9$ $-2T^7 + 8T^6 - 23T^5 + 40T^4 - 63T^3 + 76T^2 - 89T + 88$ $12T^{16} - 117T^{15} + 598T^{14} - 2057T^{13} + 5172T^{12} - 9509T^{11} + 10856T^{10} + 2734T^9 - 54502T^8 + 178917T^7 - 414312T^6 + 786766T^5 - 1289208T^4 + 1865866T^3 - 2414454T^2 + 2812025T - 2957594$	4 / ✗ 2 / ✗		$10_{63}^a$ $5T^2 - 14T + 19$ $66T^3 - 220T^2 + 416T - 496$ $-1966T^8 + 28318T^7 - 188080T^6 + 783388T^5 - 2311570T^4 + 5141906T^3 - 8929148T^2 + 12349082T - 13743884$	2 / ✗ 2 / ✗
	$10_{64}^a$ $-T^4 + 3T^3 - 6T^2 + 10T - 11$ $-T^7 + 4T^6 - 11T^5 + 24T^4 - 37T^3 + 52T^2 - 60T + 64$ $15T^{16} - 153T^{15} + 830T^{14} - 3147T^{13} + 9133T^{12} - 20983T^{11} + 37963T^{10} - 50164T^9 + 30642T^8 + 68741T^7 - 310036T^6 + 745430T^5 - 1381735T^4 + 2150560T^3 - 2906317T^2 + 3464829T - 3671204$	4 / ✗ 2 / ✗		$10_{65}^a$ $2T^3 - 7T^2 + 14T - 17$ $-5T^5 + 24T^4 - 71T^3 + 124T^2 - 169T + 180$ $118T^{12} - 1272T^{11} + 6657T^{10} - 21282T^9 + 40874T^8 - 20768T^7 - 166691T^6 + 742216T^5 - 1933704T^4 + 3781794T^3 - 5950947T^2 + 7749120T - 8452246$	3 / ✗ 2 / ✗
	$10_{66}^a$ $3T^3 - 9T^2 + 16T - 19$ $30T^5 - 112T^4 + 279T^3 - 480T^2 + 662T - 724$ $-177T^{12} + 3321T^{11} - 27536T^{10} + 145346T^9 - 561614T^8 + 1706788T^7 - 4256134T^6 + 8946173T^5 - 16135424T^4 + 25271935T^3 - 34647456T^2 + 41790680T - 44471832$	3 / ✗ 3 / ✗		$10_{67}^a$ $-4T^2 + 16T - 23$ $24T^3 - 140T^2 + 312T - 392$ $416T^8 - 1696T^7 - 18592T^6 + 205384T^5 - 971474T^4 + 2884880T^3 - 6004484T^2 + 9188872T - 10566612$	2 / ✗ 2 / ✗

knot diag	$n_k^+$ Alexander's $\omega^+$ ( $\rho_1^+$ ) <sup>+</sup>	genus / ribbon unknotting # / amphi?	knot diag	$n_k^+$ Alexander's $\omega^+$ ( $\rho_1^+$ ) <sup>+</sup>	genus / ribbon unknotting # / amphi?
	$10_{68}^a$ $4T^2 - 14T + 21$ $8T^3 - 40T^2 + 117T - 164$ 9287 <sup>8</sup> - 84487 <sup>7</sup> + 297847 <sup>6</sup> - 267367 <sup>5</sup> - 1789847 <sup>4</sup> + 8917367 <sup>3</sup> - 22171477 <sup>2</sup> + 36573907 - 4297054	2 / ✗ 2 / ✗		$10_{69}^a$ $T^3 - 7T^2 + 21T - 29$ $-T^5 + 12T^4 - 68T^3 + 212T^2 - 397T + 476$ 87 <sup>12</sup> - 1757 <sup>11</sup> + 17537 <sup>10</sup> - 103397 <sup>9</sup> + 374357 <sup>8</sup> - 681747 <sup>7</sup> - 789977 <sup>6</sup> + 10156357 <sup>5</sup> - 38807797 <sup>4</sup> + 96974917 <sup>3</sup> - 179378267 <sup>2</sup> + 256463007 - 28844672	3 / ✗ 2 / ✗
	$10_{70}^a$ $T^3 - 7T^2 + 16T - 19$ $-T^5 + 12T^4 - 53T^3 + 114T^2 - 146T + 152$ 87 <sup>12</sup> - 1757 <sup>11</sup> + 16787 <sup>10</sup> - 92207 <sup>9</sup> + 312517 <sup>8</sup> - 604507 <sup>7</sup> + 143357 <sup>6</sup> + 3375937 <sup>5</sup> - 13517737 <sup>4</sup> + 32758037 <sup>3</sup> - 58643367 <sup>2</sup> + 82086547 - 9166724	3 / ✗ 2 / ✗		$10_{71}^a$ $-T^3 + 7T^2 - 18T + 25$ $T^3 - 2T^2 - T + 4$ 97 <sup>12</sup> - 2037 <sup>11</sup> + 20727 <sup>10</sup> - 126087 <sup>9</sup> + 501677 <sup>8</sup> - 1310827 <sup>7</sup> + 1906557 <sup>6</sup> + 649377 <sup>5</sup> - 12069177 <sup>4</sup> + 37456597 <sup>3</sup> - 74361027 <sup>2</sup> + 109067787 - 12346734	3 / ✗ 1 / ✗
	$10_{72}^a$ $-2T^3 + 9T^2 - 16T + 19$ $-9T^5 + 60T^4 - 167T^3 + 298T^2 - 410T + 448$ 627 <sup>12</sup> - 6727 <sup>11</sup> + 24077 <sup>10</sup> + 28467 <sup>9</sup> - 670467 <sup>8</sup> + 3587147 <sup>7</sup> - 12374407 <sup>6</sup> + 32251367 <sup>5</sup> - 67607027 <sup>4</sup> + 117679847 <sup>3</sup> - 173157777 <sup>2</sup> + 217571467 - 23465324	3 / ✗ 2 / ✗		$10_{73}^a$ $T^3 - 7T^2 + 20T - 27$ $T^5 - 12T^4 + 65T^3 - 194T^2 + 350T - 416$ 87 <sup>12</sup> - 1757 <sup>11</sup> + 17387 <sup>10</sup> - 101127 <sup>9</sup> + 361177 <sup>8</sup> - 660387 <sup>7</sup> - 612357 <sup>6</sup> + 8694497 <sup>5</sup> - 32966037 <sup>4</sup> + 81338037 <sup>3</sup> - 148808807 <sup>2</sup> + 211228907 - 23697928	3 / ✗ 1 / ✗
	$10_{74}^a$ $-4T^2 + 16T - 23$ $24T^3 - 136T^2 + 290T - 360$ 4167 <sup>8</sup> - 19847 <sup>7</sup> - 144487 <sup>6</sup> + 1788327 <sup>5</sup> - 8705427 <sup>4</sup> + 26261047 <sup>3</sup> - 55217647 <sup>2</sup> + 85007607 - 9794748	2 / ✗ 2 / ✗		$10_{75}^a$ $-T^3 + 7T^2 - 19T + 27$ $-4T^3 + 36T^2 - 117T + 172$ 97 <sup>12</sup> - 2037 <sup>11</sup> + 20937 <sup>10</sup> - 129797 <sup>9</sup> + 530857 <sup>8</sup> - 1440607 <sup>7</sup> + 2227957 <sup>6</sup> + 459397 <sup>5</sup> - 13825077 <sup>4</sup> + 45289197 <sup>3</sup> - 93023657 <sup>2</sup> + 139269407 - 15875332	3 / ✓ 2 / ✗
	$10_{76}^a$ $-2T^3 + 7T^2 - 12T + 15$ $-9T^5 + 44T^4 - 104T^3 + 184T^2 - 245T + 272$ 627 <sup>12</sup> - 4967 <sup>11</sup> + 12637 <sup>10</sup> + 29267 <sup>9</sup> - 376117 <sup>8</sup> + 1747747 <sup>7</sup> - 5537947 <sup>6</sup> + 13597407 <sup>5</sup> - 27275057 <sup>4</sup> + 45956687 <sup>3</sup> - 66100397 <sup>2</sup> + 81933147 - 8796596	3 / ✗ 2, 3 / ✗		$10_{77}^a$ $2T^3 - 7T^2 + 14T - 17$ $-5T^5 + 24T^4 - 71T^3 + 132T^2 - 189T + 208$ 1187 <sup>12</sup> - 12727 <sup>11</sup> + 66577 <sup>10</sup> - 211707 <sup>9</sup> + 396027 <sup>8</sup> - 134807 <sup>7</sup> - 1935637 <sup>6</sup> + 8125687 <sup>5</sup> - 20724527 <sup>4</sup> + 39975387 <sup>3</sup> - 62278797 <sup>2</sup> + 80589127 - 8771174	3 / ✗ 2, 3 / ✗
	$10_{78}^a$ $-T^3 + 7T^2 - 16T + 21$ $2T^5 - 24T^4 + 105T^3 - 244T^2 + 390T - 448$ 57 <sup>12</sup> - 917 <sup>11</sup> + 6267 <sup>10</sup> - 13107 <sup>9</sup> - 96827 <sup>8</sup> + 982687 <sup>7</sup> - 4728087 <sup>6</sup> + 15588977 <sup>5</sup> - 38922007 <sup>4</sup> + 76991077 <sup>3</sup> - 123652787 <sup>2</sup> + 163513527 - 17933784	3 / ✗ 2 / ✗		$10_{79}^a$ $T^4 - 3T^3 + 7T^2 - 12T + 15$ 0 167 <sup>16</sup> - 1657 <sup>15</sup> + 9517 <sup>14</sup> - 38927 <sup>13</sup> + 123277 <sup>12</sup> - 313017 <sup>11</sup> + 640477 <sup>10</sup> - 1020887 <sup>9</sup> + 1089427 <sup>8</sup> - 51727 <sup>7</sup> - 3286357 <sup>6</sup> + 10136447 <sup>5</sup> - 20993187 <sup>4</sup> + 34867987 <sup>3</sup> - 49048247 <sup>2</sup> + 59791097 - 6380898	4 / ✗ 2, 3 / ✓
	$10_{80}^a$ $3T^3 - 9T^2 + 15T - 17$ $30T^5 - 112T^4 + 260T^3 - 426T^2 + 568T - 616$ -1777 <sup>12</sup> + 33217 <sup>11</sup> - 269197 <sup>10</sup> + 1374197 <sup>9</sup> - 5117887 <sup>8</sup> + 15009067 <sup>7</sup> - 36256087 <sup>6</sup> + 74200937 <sup>5</sup> - 131017857 <sup>4</sup> + 201967677 <sup>3</sup> - 273886557 <sup>2</sup> + 328264447 - 34860060	3 / ✗ 3 / ✗		$10_{81}^a$ $-T^3 + 8T^2 - 20T + 27$ 0 97 <sup>12</sup> - 2327 <sup>11</sup> + 26327 <sup>10</sup> - 173477 <sup>9</sup> + 731467 <sup>8</sup> - 1994767 <sup>7</sup> + 3037177 <sup>6</sup> + 635167 <sup>5</sup> - 17832227 <sup>4</sup> + 56366747 <sup>3</sup> - 112399187 <sup>2</sup> + 165010927 - 18681194	3 / ✗ 2 / ✓
	$10_{82}^a$ $-T^4 + 4T^3 - 8T^2 + 12T - 13$ $T^7 - 6T^6 + 19T^5 - 42T^4 + 64T^3 - 78T^2 + 84T - 84$ 157 <sup>16</sup> - 2047 <sup>15</sup> + 13627 <sup>14</sup> - 59567 <sup>13</sup> + 190677 <sup>12</sup> - 469407 <sup>11</sup> + 896467 <sup>10</sup> - 1259847 <sup>9</sup> + 943797 <sup>8</sup> + 1184887 <sup>7</sup> - 6636007 <sup>6</sup> + 16759447 <sup>5</sup> - 31876267 <sup>4</sup> + 50465087 <sup>3</sup> - 68996327 <sup>2</sup> + 82827527 - 8796438	4 / ✗ 1 / ✗		$10_{83}^a$ $2T^3 - 9T^2 + 19T - 23$ $-5T^5 + 34T^4 - 110T^3 + 214T^2 - 301T + 332$ 1187 <sup>12</sup> - 16327 <sup>11</sup> + 105017 <sup>10</sup> - 401667 <sup>9</sup> + 921547 <sup>8</sup> - 746617 <sup>7</sup> - 3449387 <sup>6</sup> + 18290497 <sup>5</sup> - 51557867 <sup>4</sup> + 105890037 <sup>3</sup> - 171840027 <sup>2</sup> + 227634167 - 24966116	3 / ✗ 2 / ✗
	$10_{84}^a$ $2T^3 - 9T^2 + 20T - 25$ $-5T^5 + 34T^4 - 116T^3 + 246T^2 - 373T + 424$ 1187 <sup>12</sup> - 16327 <sup>11</sup> + 106017 <sup>10</sup> - 409707 <sup>9</sup> + 933617 <sup>8</sup> - 601307 <sup>7</sup> - 4577127 <sup>6</sup> + 22761847 <sup>5</sup> - 63799777 <sup>4</sup> + 131310887 <sup>3</sup> - 213701257 <sup>2</sup> + 283635427 - 31128704	3 / ✗ 1 / ✗		$10_{85}^a$ $T^4 - 4T^3 + 8T^2 - 10T + 11$ $2T^7 - 12T^6 + 36T^5 - 68T^4 + 101T^3 - 124T^2 + 138T - 140$ 127 <sup>16</sup> - 1567 <sup>15</sup> + 9867 <sup>14</sup> - 39827 <sup>13</sup> + 113197 <sup>12</sup> - 230427 <sup>11</sup> + 299877 <sup>10</sup> - 30987 <sup>9</sup> - 1164607 <sup>8</sup> + 4183147 <sup>7</sup> - 10054257 <sup>6</sup> + 19530487 <sup>5</sup> - 32523987 <sup>4</sup> + 47647767 <sup>3</sup> - 62206117 <sup>2</sup> + 72850427 - 7676632	4 / ✗ 2 / ✗
	$10_{86}^a$ $-2T^3 + 9T^2 - 19T + 25$ $-T^5 + 6T^4 - 21T^3 + 58T^2 - 105T + 128$ 1427 <sup>12</sup> - 20567 <sup>11</sup> + 141357 <sup>10</sup> - 603467 <sup>9</sup> + 1730737 <sup>8</sup> - 3224577 <sup>7</sup> + 2561327 <sup>6</sup> + 6408397 <sup>5</sup> - 31921787 <sup>4</sup> + 78065117 <sup>3</sup> - 137127317 <sup>2</sup> + 188520807 - 20906284	3 / ✗ 2 / ✗		$10_{87}^a$ $-2T^3 + 9T^2 - 18T + 23$ $-T^5 + 6T^4 - 23T^3 + 66T^2 - 125T + 152$ 1427 <sup>12</sup> - 20567 <sup>11</sup> + 139557 <sup>10</sup> - 583187 <sup>9</sup> + 1627987 <sup>8</sup> - 2932287 <sup>7</sup> + 2148677 <sup>6</sup> + 6129607 <sup>5</sup> - 28824607 <sup>4</sup> + 69025707 <sup>3</sup> - 119796697 <sup>2</sup> + 163614447 - 18106010	3 / ✓ 2 / ✗
	$10_{88}^a$ 0 $-T^3 + 8T^2 - 24T + 35$ 97 <sup>12</sup> - 2327 <sup>11</sup> + 27167 <sup>10</sup> - 189557 <sup>9</sup> + 863007 <sup>8</sup> - 2576647 <sup>7</sup> + 4362817 <sup>6</sup> + 557607 <sup>5</sup> - 28236567 <sup>4</sup> + 96579627 <sup>3</sup> - 203064807 <sup>2</sup> + 307754727 - 35215022	3 / ✗ 1 / ✓		$10_{89}^a$ $T^3 - 8T^2 + 24T - 33$ $T^5 - 14T^4 + 83T^3 - 264T^2 + 495T - 596$ 87 <sup>12</sup> - 2007 <sup>11</sup> + 22367 <sup>10</sup> - 144617 <sup>9</sup> + 569927 <sup>8</sup> - 1170727 <sup>7</sup> - 761527 <sup>6</sup> + 15086047 <sup>5</sup> - 60939367 <sup>4</sup> + 156200307 <sup>3</sup> - 292866047 <sup>2</sup> + 421554007 - 47509694	3 / ✗ 2 / ✗
	$10_{90}^a$ $-2T^3 + 8T^2 - 17T + 23$ $-T^5 + 6T^4 - 21T^3 + 54T^2 - 93T + 112$ 1427 <sup>12</sup> - 18247 <sup>11</sup> + 114527 <sup>10</sup> - 455687 <sup>9</sup> + 1231537 <sup>8</sup> - 2149767 <sup>7</sup> + 1385157 <sup>6</sup> + 5239187 <sup>5</sup> - 23090347 <sup>4</sup> + 54584437 <sup>3</sup> - 94323097 <sup>2</sup> + 128614967 - 14226804	3 / ✗ 2 / ✗		$10_{91}^a$ $T^4 - 4T^3 + 9T^2 - 14T + 17$ $T^5 - 2T^4 + 2T^3 - 3T + 4$ 167 <sup>16</sup> - 2207 <sup>15</sup> + 15357 <sup>14</sup> - 71667 <sup>13</sup> + 248857 <sup>12</sup> - 674767 <sup>11</sup> + 1450707 <sup>10</sup> - 2420147 <sup>9</sup> + 2787537 <sup>8</sup> - 782127 <sup>7</sup> - 6243297 <sup>6</sup> + 20919107 <sup>5</sup> - 44241087 <sup>4</sup> + 73976307 <sup>3</sup> - 104254187 <sup>2</sup> + 127118147 - 13565348	4 / ✗ 1 / ✗
	$10_{92}^a$ $-2T^3 + 10T^2 - 20T + 25$ $-9T^5 + 68T^4 - 216T^3 + 428T^2 - 622T + 696$ 627 <sup>12</sup> - 7607 <sup>11</sup> + 32287 <sup>10</sup> + 17767 <sup>9</sup> - 906867 <sup>8</sup> + 5557727 <sup>7</sup> - 21141697 <sup>6</sup> + 59519647 <sup>5</sup> - 132511597 <sup>4</sup> + 241278507 <sup>3</sup> - 366240167 <sup>2</sup> + 468624607 - 50844652	3 / ✗ 2 / ✗		$10_{93}^a$ $2T^3 - 8T^2 + 15T - 17$ $3T^5 - 18T^4 + 43T^3 - 58T^2 + 55T - 48$ 1347 <sup>12</sup> - 16967 <sup>11</sup> + 101807 <sup>10</sup> - 378807 <sup>9</sup> + 941837 <sup>8</sup> - 1472727 <sup>7</sup> + 627297 <sup>6</sup> + 4248667 <sup>5</sup> - 16185967 <sup>4</sup> + 36167437 <sup>3</sup> - 60597937 <sup>2</sup> + 81308687 - 8948936	3 / ✗ 2 / ✗
	$10_{94}^a$ $-T^4 + 4T^3 - 9T^2 + 14T - 15$ $-T^7 + 6T^6 - 20T^5 + 46T^4 - 76T^3 + 102T^2 - 115T + 120$ 157 <sup>16</sup> - 2047 <sup>15</sup> + 14057 <sup>14</sup> - 64547 <sup>13</sup> + 219077 <sup>12</sup> - 574327 <sup>11</sup> + 1170807 <sup>10</sup> - 1767547 <sup>9</sup> + 1504057 <sup>8</sup> + 1359727 <sup>7</sup> - 9287177 <sup>6</sup> + 24606427 <sup>5</sup> - 48040197 <sup>4</sup> + 77294627 <sup>3</sup> - 106729907 <sup>2</sup> + 128815667 - 13703760	4 / ✗ 2 / ✗		$10_{95}^a$ $2T^3 - 9T^2 + 21T - 27$ $-5T^5 + 32T^4 - 114T^3 + 248T^2 - 384T + 436$ 1187 <sup>12</sup> - 16567 <sup>11</sup> + 110457 <sup>10</sup> - 444627 <sup>9</sup> + 1091187 <sup>8</sup> - 1040357 <sup>7</sup> - 3915837 <sup>6</sup> + 22980837 <sup>5</sup> - 68047117 <sup>4</sup> + 144567097 <sup>3</sup> - 240080827 <sup>2</sup> + 322366967 - 35514492	3 / ✗ 1 / ✗
	$10_{96}^a$ $-T^3 + 7T^2 - 22T + 33$ $-7T^3 + 50T^2 - 147T + 212$ 97 <sup>12</sup> - 2037 <sup>11</sup> + 21567 <sup>10</sup> - 140607 <sup>9</sup> + 611897 <sup>8</sup> - 1770347 <sup>7</sup> + 2874377 <sup>6</sup> + 966897 <sup>5</sup> - 21496997 <sup>4</sup> + 72315877 <sup>3</sup> - 152280827 <sup>2</sup> + 231633547 - 26546674	3 / ✗ 2 / ✗		$10_{97}^a$ $-5T^2 + 22T - 33$ $-37T^3 + 242T^2 - 603T + 788$ 10617 <sup>8</sup> - 54867 <sup>7</sup> - 470907 <sup>6</sup> + 6150647 <sup>5</sup> - 31571657 <sup>4</sup> + 99049267 <sup>3</sup> - 213764467 <sup>2</sup> + 333957867 - 38661308	2 / ✗ 2 / ✗
	$10_{98}^a$ $-2T^3 + 9T^2 - 18T + 23$ $9T^5 - 60T^4 + 177T^3 - 348T^2 + 501T - 564$ 627 <sup>12</sup> - 6727 <sup>11</sup> + 25757 <sup>10</sup> + 16667 <sup>9</sup> - 676027 <sup>8</sup> + 3989487 <sup>7</sup> - 14838137 <sup>6</sup> + 41157767 <sup>5</sup> - 90698007 <sup>4</sup> + 163963787 <sup>3</sup> - 247679657 <sup>2</sup> + 316021487 - 34255402	3 / ✗ 2 / ✗		$10_{99}^a$ $T^4 - 4T^3 + 10T^2 - 16T + 19$ 0 167 <sup>16</sup> - 2207 <sup>15</sup> + 15807 <sup>14</sup> - 76887 <sup>13</sup> + 279767 <sup>12</sup> - 796127 <sup>11</sup> + 1796567 <sup>10</sup> - 3150607 <sup>9</sup> + 3862727 <sup>8</sup> - 1481607 <sup>7</sup> - 7921727 <sup>6</sup> + 28547487 <sup>5</sup> - 62378247 <sup>4</sup> + 106496447 <sup>3</sup> - 152141567 <sup>2</sup> + 186966087 - 20003232	4 / ✓ 2 / ✓
	$10_{100}^a$ $T^4 - 4T^3 + 9T^2 - 12T + 13$ $2T^7 - 12T^6 + 39T^5 - 80T^4 + 128T^3 - 164T^2 + 192T - 196$ 127 <sup>16</sup> - 1567 <sup>15</sup> + 10197 <sup>14</sup> - 43407 <sup>13</sup> + 131897 <sup>12</sup> - 290127 <sup>11</sup> + 417157 <sup>10</sup> - 112327 <sup>9</sup> - 1536117 <sup>8</sup> + 6031167 <sup>7</sup> - 15205137 <sup>6</sup> + 30494527 <sup>5</sup> - 51904147 <sup>4</sup> + 77153047 <sup>3</sup> - 101642347 <sup>2</sup> + 119616847 - 12623974	4 / ✗ 2, 3 / ✗		$10_{101}^a$ $7T^2 + 21T + 29$ $-129T^3 + 480T^2 - 942T + 1148$ -74537 <sup>8</sup> + 1159797 <sup>7</sup> - 8199477 <sup>6</sup> + 35868477 <sup>5</sup> - 109875737 <sup>4</sup> + 251203597 <sup>3</sup> - 444436957 <sup>2</sup> + 621337787 - 69396618	2 / ✗ 2, 3 / ✗



knot diag	$n'_k$ Alexander's $\omega^+$ ( $\rho'_i$ ) <sup>+</sup>	genus / ribbon unknotting # / amphi?	knot diag	$n'_k$ Alexander's $\omega^+$ ( $\rho'_i$ ) <sup>+</sup>	genus / ribbon unknotting # / amphi?
	$10^a_{102} \quad -2T^3+8T^2-16T+21$ $-T^5+6T^4-19T^3+50T^2-89T+108$ $1427^{12}-18247^{11}+112967^{10}-440007^9+1159847^8-1972007^7+1232037^6+4625127^5-19960647^4+$ $46492987^3-79518407^2+107771607-11897326$	3 / ✗ 1 / ✗		$10^a_{103} \quad 2T^3-8T^2+17T-21$ $5T^5-30T^4+93T^3-178T^2+254T-280$ $1187^{12}-14407^{11}+84047^{10}-295847^9+618637^8-337367^7-2897637^6+13551867^5-3666737^4+$ $73674137^3-118029747^2+155259087-16990056$	3 / ✗ 3 / ✗
	$10^a_{104} \quad T^4-4T^3+9T^2-15T+19$ $T^5-2T^4+2T^3-3T+4$ $167^{16}-2207^{15}+15357^{14}-71977^{13}+252277^{12}-693327^{11}+1515137^{10}-2572797^9+3013667^8-833937^7-$ $7104027^6+24094697^5-51622977^4+87264787^3-123976637^2+151912037-16238052$	4 / ✗ 1 / ✗		$10^a_{105} \quad T^3-8T^2+22T-29$ $-T^5+14T^4-71T^3+184T^2-292T+332$ $87^{12}-2007^{11}+22187^{10}-142617^9+571237^8-1329867^7+653027^6+8053067^5-37228417^4+97844307^3-$ $184005877^2+264412867-29769592$	3 / ✗ 2 / ✗
	$10^a_{106} \quad -T^4+4T^3-9T^2+15T-17$ $-T^7+6T^6-20T^5+48T^4-82T^3+114T^2-134T+140$ $157^{16}-2047^{15}+14057^{14}-64817^{13}+221977^{12}-589487^{11}+1220177^{10}-1869377^9+1592527^8+1616537^7-$ $10731907^6+28726717^5-56744797^4+92214947^3-128273107^2+155510037-16568312$	4 / ✗ 2 / ✗		$10^a_{107} \quad -T^3+8T^2-22T+31$ $2T^5-8T^2+13T-16$ $97^{12}-2327^{11}+26747^{10}-181557^9+797057^8-2279867^7+3666637^6+654307^5-22852837^4+75183987^3-$ $154085137^2+229974707-26180364$	3 / ✗ 1 / ✗
	$10^a_{108} \quad 2T^3-8T^2+14T-15$ $-3T^5+18T^4-41T^3+50T^2-40T+32$ $1347^{12}-16967^{11}+100327^{10}-364167^9+879167^8-1338607^7+586177^6+3533927^5-13376427^4+$ $29610067^3-49304497^2+65948547-7251776$	3 / ✗ 2 / ✗		$10^a_{109} \quad T^4-4T^3+10T^2-17T+21$ 0 $167^{16}-2207^{15}+15807^{14}-77197^{13}+283187^{12}-815257^{11}+1865917^{10}-3323517^9+4136967^8-1582847^7-$ $8891297^6+32393717^5-71654117^4+123617387^3-177991977^2+219796577-23554274$	4 / ✗ 2 / ✓
	$10^a_{110} \quad T^3-8T^2+20T-25$ $T^5-14T^4+69T^3-160T^2+219T-236$ $87^{12}-2007^{11}+21807^{10}-135697^9+521147^8-1164727^7+616167^6+6046687^5-27479067^4+70722747^3-$ $131039187^2+186728367-20967250$	3 / ✗ 2 / ✗		$10^a_{111} \quad -2T^3+9T^2-17T+21$ $-9T^5+60T^4-171T^3+316T^2-436T+480$ $627^{12}-6727^{11}+25077^{10}+18947^9-640677^8+3617057^7-12991457^6+35068897^5-75755917^4+$ $135100697^3-202348357^2+257002287-27818092$	3 / ✗ 2 / ✗
	$10^a_{112} \quad -T^4+5T^3-11T^2+17T-19$ $T^7-8T^6+29T^5-68T^4+115T^3-152T^2+175T-180$ $157^{16}-2557^{15}+20687^{14}-106997^{13}+396507^{12}-1111607^{11}+2394017^{10}-3813387^9+3575957^8+2152407^7-$ $19005907^6+52520997^5-104706527^4+170626837^3-237472577^2+287866487-30666904$	4 / ✗ 2 / ✗		$10^a_{113} \quad 2T^3-11T^2+26T-33$ $-5T^5+42T^4-167T^3+394T^2-623T+720$ $1187^{12}-20167^{11}+156817^{10}-711267^9+1907127^8-1874167^7-8270537^6+49358927^5-149861467^4+$ $324562827^3-546065357^2+738723807-81581546$	3 / ✗ 1 / ✗
	$10^a_{114} \quad -2T^3+10T^2-21T+27$ $T^5-8T^4+30T^3-78T^2+140T-168$ $1427^{12}-22807^{11}+169767^{10}-769767^9+2309997^8-4458767^7+3694507^6+8900447^5-45544877^4+$ $112565197^3-198907367^2+274316867-30450926$	3 / ✗ 1 / ✗		$10^a_{115} \quad -T^3+9T^2-26T+37$ 0 $97^{12}-2617^{11}+33457^{10}-249427^9+1188707^8-3659327^7+6364977^6+315277^5-39077307^4+134726497^3-$ $282980397^2+427989447-48929878$	3 / ✗ 2 / ✓
	$10^a_{116} \quad -T^4+5T^3-12T^2+19T-21$ $T^7-8T^6+30T^5-74T^4+132T^3-184T^2+217T-228$ $157^{16}-2557^{15}+21117^{14}-113027^{13}+436687^{12}-1280237^{11}+2885757^{10}-4823077^9+4859857^8+2150187^7-$ $24167117^6+69420307^5-141422467^4+233746227^3-328326557^2+400086977-42694444$	4 / ✗ 2 / ✗		$10^a_{117} \quad 2T^3-10T^2+24T-31$ $-5T^5+38T^4-144T^3+330T^2-522T+600$ $1187^{12}-18247^{11}+131567^{10}-563127^9+1437467^8-1282127^7-6487317^6+37010127^5-110807177^4+$ $238442307^3-399947307^2+540333527-59650184$	3 / ✗ 2 / ✗
	$10^a_{118} \quad T^4-5T^3+12T^2-19T+23$ 0 $167^{16}-2757^{15}+23057^{14}-125267^{13}+493797^{12}-1490777^{11}+3520677^{10}-6419877^9+8251467^8-3994947^7-$ $14580867^6+56417847^5-125898797^4+217127567^3-311879347^2+384321957-41152780$	4 / ✗ 1 / ✓		$10^a_{119} \quad -2T^3+10T^2-23T+31$ $-T^5+6T^4-26T^3+86T^2-175T+220$ $1427^{12}-22887^{11}+173927^{10}-815607^9+2557197^8-5218207^7+4833547^6+9905247^5-56180507^4+$ $144994057^3-263398357^2+369164187-41198798$	3 / ✗ 1 / ✗
	$10^a_{120} \quad 8T^2-26T+37$ $166T^3-692T^2+1433T-1788$ $-117687^8+2013207^7-15411327^6+71939607^5-231935627^4+550984087^3-1001011577^2+1421361867-159564534$	2 / ✗ 2, 3 / ✗		$10^a_{121} \quad 2T^3-11T^2+27T-35$ $5T^5-42T^4+167T^3-396T^2+634T-732$ $1187^{12}-20167^{11}+158537^{10}-734507^9+2046057^8-2323517^7-7642517^6+50542057^5-158908537^4+$ $351606337^3-599960797^2+818317487-90616328$	3 / ✗ 2 / ✗
	$10^a_{122} \quad -2T^3+11T^2-24T+31$ $-T^5+8T^4-34T^3+104T^2-211T+264$ $1427^{12}-25127^{11}+203557^{10}-993627^9+3185357^8-6570147^7+6170407^6+11996367^5-68695797^4+$ $176632087^3-319530917^2+446562227-49787168$	3 / ✗ 2 / ✗		$10^a_{123} \quad T^4-6T^3+15T^2-24T+29$ 0 $167^{16}-3307^{15}+32167^{14}-197707^{13}+861707^{12}-2825007^{11}+7151627^{10}-13887907^9+19173507^8-$ $11697207^7-28325207^6+123637847^5-286896607^4+505601107^3-735797007^2+913251587-98015944$	4 / ✓ 2 / ✓
	$10^a_{124} \quad T^4-T^3+T-1$ $-4T^7-6T^4-4T^2-6T$ $97^{15}-257^{14}+107^{13}+757^{12}-1777^{11}+1557^{10}+1137^9-5707^8+8507^7-4287^6-8247^5+21677^4-23407^3+$ $5107^2+23757-3832$	4 / ✗ 4 / ✗		$10^a_{125} \quad T^3-2T^2+2T-1$ $-T^5+2T^4-2T^3+3T-4$ $87^{12}-507^{11}+1517^{10}-2897^9+4177^8-5247^7+5367^6-1507^5-11687^4+39427^3-81307^2+123147-14126$	3 / ✗ 2 / ✗
	$10^a_{126} \quad T^3-2T^2+4T-5$ $T^5-2T^4+10T^3-12T^2+22T-20$ $87^{12}-507^{11}+1857^{10}-4577^9+6667^8-1877-30747^6+107247^5-244957^4+437387^3-646317^2+810727-87356$	3 / ✗ 2 / ✗		$10^a_{127} \quad -T^3+4T^2-6T+7$ $2T^5-14T^4+32T^3-52T^2+67T-72$ $57^{12}-487^{11}+1287^{10}+2897^9-35517^8+155547^7-465897^6+1092067^5-2116257^4+3483707^3-4941077^2+$ $6081547-651576$	3 / ✗ 2 / ✗
	$10^a_{128} \quad 2T^3-3T^2+T+1$ $-13T^5+12T^4-3T^3-10T^2-9T+12$ $-267^{12}+2967^{11}-10717^{10}+17507^9-11077^8+2877^7-29387^6+79597^5-78207^4+31757^3-87227^2+283927-40368$	3 / ✗ 3 / ✗		$10^a_{129} \quad 2T^2-6T+9$ $-T^3-2T^2+14T-20$ $627^8-5687^7+22807^6-43087^5-5537^4+256167^3-761257^2+1322587-157332$	2 / ✓ 1 / ✗
	$10^a_{130} \quad 2T^2-4T+5$ $T^3-2T^2+19T-24$ $627^8-3367^7+9247^6-15687^5+2537^4+83847^3-286687^2+536287-65374$	2 / ✗ 2 / ✗		$10^a_{131} \quad -2T^2+8T-11$ $5T^3-38T^2+87T-112$ $387^8-2727^7-5807^6+127927^5-664177^4+2020967^3-4226627^2+6464407-742870$	2 / ✗ 1 / ✗
	$10^a_{132} \quad T^2-T+1$ $2T^2+5T-4$ $47^8-77^7+127^6-1457^5+5087^4-6317^3-3227^2+21507-3150$	2 / ✗ 1 / ✗		$10^a_{133} \quad -T^2+5T-7$ $T^3-14T^2+37T-48$ $37^8-437^7+167^6+14897^5-93227^4+309457^3-680477^2+1069547-123994$	2 / ✗ 1 / ✗
	$10^a_{134} \quad 2T^3-4T^2+4T-3$ $-13T^5+24T^4-33T^3+30T^2-41T+40$ $-267^{12}+3767^{11}-20567^{10}+67607^9-162487^8+325687^7-589517^6+983167^5-1501947^4+2107387^3-$ $2732467^2+3241247-344346$	3 / ✗ 3 / ✗		$10^a_{135} \quad 3T^2-9T+13$ $T^3-6T^2+18T-24$ $3217^8-26137^7+89057^6-120337^5-193297^4+1324517^3-3370257^2+5530027-647370$	2 / ✗ 2 / ✗
	$10^a_{136} \quad -T^2+4T-5$ $-T^3+4T^2-2T-4$ $37^8-367^7+1897^6-5127^5+3477^4+26607^3-111427^2+226687-28354$	2 / ✗ 1 / ✗		$10^a_{137} \quad T^2-6T+11$ $-4T^2+24T-44$ $47^8-747^7+5127^6-14207^5-11607^4+210747^3-729047^2+1409227-173900$	2 / ✓ 1 / ✗



knot diag	$n_k^l$ Alexander's $\omega^+$ $(\rho_1^l)^+$	genus / ribbon unknotting # / amphi?	knot diag	$n_k^l$ Alexander's $\omega^+$ $(\rho_1^l)^+$	genus / ribbon unknotting # / amphi?
	$10_{138}^n$ $T^3 - 5T^2 + 8T - 7$ $-T^5 + 8T^4 - 22T^3 + 24T^2 - 11T + 8$ $8T^{12} - 125T^{11} + 855T^{10} - 3374T^9 + 8458T^8 - 13328T^7 + 8173T^6 + 25863T^5 - 114602T^4 + 277037T^3 - 497313T^2 + 702260T - 787812$	3 / ✗ 2 / ✗		$10_{139}^n$ $T^4 - T^3 + 2T - 3$ $-4T^7 - 12T^4 + 5T^3 - 4T^2 - 16T + 12$ $9T^{15} - 25T^{14} - 37T^{13} + 172T^{12} - 425T^{11} + 290T^{10} + 924T^9 - 3099T^8 + 4327T^7 - 1756T^6 - 5200T^5 + 12117T^4 - 11846T^3 + 1547T^2 + 12451T - 19002$	4 / ✗ 4 / ✗
	$10_{140}^n$ $T^2 - 2T + 3$ $8T - 8$ $4T^8 - 22T^7 + 90T^6 - 292T^5 + 424T^4 + 430T^3 - 3056T^2 + 6470T - 8104$	2 / ✓ 2 / ✗		$10_{141}^n$ $-T^3 + 3T^2 - 4T + 5$ $T^3 - 8T^2 + 16T - 20$ $9T^{12} - 87T^{11} + 396T^{10} - 1150T^9 + 2382T^8 - 3516T^7 + 2746T^6 + 3397T^5 - 19148T^4 + 46359T^3 - 80476T^2 + 109936T - 121692$	3 / ✗ 1 / ✗
	$10_{142}^n$ $2T^3 - 3T^2 + 2T - 1$ $-13T^5 + 12T^4 - 13T^3 + 4T^2 - 17T + 12$ $-26T^{12} + 296T^{11} - 1155T^{10} + 2582T^9 - 4276T^8 + 6812T^7 - 11749T^6 + 19392T^5 - 27878T^4 + 36798T^3 - 48891T^2 + 62932T - 69706$	3 / ✗ 3 / ✗		$10_{143}^n$ $T^3 - 3T^2 + 6T - 7$ $T^5 - 4T^4 + 15T^3 - 28T^2 + 45T - 48$ $8T^{12} - 75T^{11} + 362T^{10} - 1106T^9 + 2070T^8 - 1092T^7 - 7698T^6 + 33841T^5 - 86216T^4 + 164927T^3 - 254838T^2 + 327896T - 356170$	3 / ✗ 1 / ✗
	$10_{144}^n$ $-3T^2 + 10T - 13$ $10T^3 - 44T^2 + 80T - 96$ $222T^8 - 1642T^7 + 3140T^6 + 12252T^5 - 94326T^4 + 307146T^3 - 651636T^2 + 998418T - 1147140$	2 / ✗ 2 / ✗		$10_{145}^n$ $T^2 + T - 3$ $2T^3 + 8T^2 + 6T - 8$ $-5T^7 + 7T^6 + 113T^5 - 141T^4 - 465T^3 + 730T^2 + 850T - 2198$	2 / ✗ 2 / ✗
	$10_{146}^n$ $2T^2 - 8T + 13$ $T^3 - 8T^2 + 21T - 28$ $62T^8 - 664T^7 + 2844T^6 - 4544T^5 - 9663T^4 + 71376T^3 - 197106T^2 + 340392T - 405394$	2 / ✗ 1 / ✗		$10_{147}^n$ $-2T^2 + 7T - 9$ $-3T^3 + 12T^2 - 15T + 12$ $54T^8 - 488T^7 + 1697T^6 - 1694T^5 - 8312T^4 + 42905T^3 - 107222T^2 + 177492T - 208860$	2 / ✗ 1 / ✗
	$10_{148}^n$ $T^3 - 3T^2 + 7T - 9$ $T^5 - 4T^4 + 18T^3 - 36T^2 + 62T - 68$ $8T^{12} - 75T^{11} + 377T^{10} - 1209T^9 + 2330T^8 - 864T^7 - 11900T^6 + 51677T^5 - 135261T^4 + 266207T^3 - 420746T^2 + 549160T - 599424$	3 / ✗ 2 / ✗		$10_{149}^n$ $T^3 - 3T^2 - 9T + 11$ $2T^5 - 18T^4 + 55T^3 - 104T^2 + 149T - 164$ $5T^{12} - 61T^{11} + 226T^{10} + 339T^9 - 7195T^8 + 38874T^7 - 135727T^6 + 357173T^5 - 753890T^4 + 1318245T^3 - 1945105T^2 + 2447584T - 2640944$	3 / ✗ 2 / ✗
	$10_{150}^n$ $-T^3 + 4T^2 - 6T + 7$ $-2T^5 + 12T^4 - 26T^3 + 38T^2 - 45T + 44$ $5T^{12} - 52T^{11} + 216T^{10} - 355T^9 - 719T^8 + 6578T^7 - 24361T^6 + 64526T^5 - 137117T^4 + 243126T^3 - 364723T^2 + 464942T - 504136$	3 / ✗ 2 / ✗		$10_{151}^n$ $T^3 - 4T^2 + 10T - 13$ $-T^5 + 6T^4 - 21T^3 + 42T^2 - 66T + 72$ $8T^{12} - 100T^{11} + 632T^{10} - 2529T^9 + 6645T^8 - 9606T^7 - 5854T^6 + 80466T^5 - 270269T^4 + 605378T^3 - 103389T^2 + 1408362T - 1558600$	3 / ✗ 2 / ✗
	$10_{152}^n$ $T^4 - T^3 - T^2 + 4T - 5$ $4T^7 - 7T^5 + 18T^4 - 7T^3 - 12T^2 + 45T - 52$ $9T^{15} - 14T^{14} - 92T^{13} + 396T^{12} - 4197T^{11} - 1212T^{10} + 5444T^9 - 9692T^8 + 6412T^7 + 11488T^6 - 39344T^5 + 55244T^4 - 33234T^3 - 30168T^2 + 102115T - 133894$	4 / ✗ 4 / ✗		$10_{153}^n$ $T^3 - T^2 - T + 3$ $T^5 - 2T^4 + T^3 + 2T^2 - T$ $8T^{12} - 17T^{11} - 46T^{10} + 231T^9 - 381T^8 + 364T^7 - 367T^6 + 157T^5 + 1142T^4 - 2815T^3 + 1874T^2 + 2128T - 4572$	3 / ✓ 2 / ✗
	$10_{154}^n$ $T^3 - 4T + 7$ $-3T^5 - 6T^4 + 13T^3 - 47T + 68$ $48T^{10} - 93T^9 - 546T^8 + 2396T^7 - 1956T^6 - 8376T^5 + 25906T^4 - 23802T^3 - 25690T^2 + 102540T - 140874$	3 / ✗ 3 / ✗		$10_{155}^n$ $-T^3 + 3T^2 - 5T + 7$ $-2T^3 + 12T^2 - 22T + 28$ $9T^{12} - 87T^{11} + 417T^{10} - 1321T^9 + 3014T^8 - 4806T^7 + 3646T^6 + 46917T^5 - 34773T^4 + 82963T^3 - 142781T^2 + 193836T - 214060$	3 / ✓ 2 / ✗
	$10_{156}^n$ $T^3 - 4T^2 + 8T - 9$ $T^5 - 6T^4 + 19T^3 - 30T^2 + 33T - 32$ $8T^{12} - 100T^{11} + 594T^{10} - 2165T^9 + 5120T^8 - 6852T^7 - 2208T^6 + 41208T^5 - 134214T^4 + 293026T^3 - 493422T^2 + 668112T - 738218$	3 / ✗ 1 / ✗		$10_{157}^n$ $-T^3 + 5T^2 - 11T + 13$ $-2T^5 + 22T^4 - 78T^3 + 148T^2 - 218T + 240$ $5T^{12} - 74T^{11} + 340T^{10} + 321T^9 - 11314T^8 + 67637T^7 - 250977T^6 + 688036T^5 - 1493487T^4 + 2661131T^3 - 3974091T^2 + 5034465T - 5444000$	3 / ✗ 2 / ✗
	$10_{158}^n$ $-T^3 + 4T^2 - 10T + 15$ $2T^2 - 7T + 12$ $9T^{12} - 116T^{11} + 764T^{10} - 3275T^9 + 9743T^8 - 19422T^7 + 18439T^6 + 32898T^5 - 196271T^4 + 513374T^3 - 940025T^2 + 1323614T - 1479452$	3 / ✗ 2 / ✗		$10_{159}^n$ $T^3 - 4T^2 + 9T - 11$ $T^5 - 6T^4 + 26T^3 - 60T^2 + 98T - 112$ $8T^{12} - 100T^{11} + 609T^{10} - 2267T^9 + 5047T^8 - 3237T^7 - 23513T^6 + 115362T^5 - 318739T^4 + 648093T^3 - 1045247T^2 + 1379659T - 1511358$	3 / ✗ 1 / ✗
	$10_{160}^n$ $-T^3 + 4T^2 - 4T + 3$ $-2T^5 + 12T^4 - 20T^3 + 14T^2 - 16T + 12$ $57T^{12} - 52T^{11} + 198T^{10} - 255T^9 - 522T^8 + 3092T^7 - 8443T^6 + 18756T^5 - 37588T^4 + 67858T^3 - 108568T^2 + 148444T - 165862$	3 / ✗ 2 / ✗		$10_{161}^n$ $T^3 - 2T + 3$ $3T^5 + 6T^4 - 3T^3 + 4T^2 + 14T - 12$ $30T^{10} - 53T^9 - 145T^8 + 630T^7 - 674T^6 - 870T^5 + 3591T^4 - 4450T^3 + 581T^2 + 6166T - 9640$	3 / ✗ 3 / ✗
	$10_{162}^n$ $-3T^2 + 9T - 11$ $10T^3 - 38T^2 + 58T - 68$ $222T^8 - 1473T^7 + 2609T^6 + 8829T^5 - 65543T^4 + 206079T^3 - 427536T^2 + 647498T - 741358$	2 / ✗ 2 / ✗		$10_{163}^n$ $T^3 - 5T^2 + 12T - 15$ $-T^5 + 8T^4 - 30T^3 + 62T^2 - 89T + 96$ $8T^{12} - 125T^{11} + 923T^{10} - 4154T^9 + 12040T^8 - 19732T^7 - 4345T^6 + 140575T^5 - 506052T^4 + 1171653T^3 - 2040193T^2 + 2809224T - 3119648$	3 / ✗ 1, 2 / ✗
	$10_{164}^n$ $3T^2 - 11T + 17$ $T^3 - 10T^2 + 29T - 40$ $321T^8 - 3179T^7 + 12782T^6 - 20103T^5 - 32876T^4 + 254013T^3 - 688337T^2 + 1170838T - 1386922$	2 / ✗ 1 / ✗		$10_{165}^n$ $-2T^2 + 10T - 15$ $-5T^3 + 50T^2 - 146T + 196$ $38T^8 - 344T^7 - 848T^6 + 23020T^5 - 137555T^4 + 465256T^3 - 1047705T^2 + 1673914T - 1951560$	2 / ✗ 2 / ✗